

THE HONOURABLE ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir/Madam:

Transmitted herewith for filing is the patent application of

Inventor(s): Matthew D. BROWN, Colin G. KELLY, Phil CAMPBELL, and Tony BITZANIS

For: ASYNCHRONOUS PAYLOAD MAPPING USING DIRECT PHASE TRANSFER

Enclosed are:

- ☒ 15 sheet(s) of drawing(s).
☒ An assignment of the inventor(s) to NORTEL NETWORKS LIMITED
☐ A certified copy of a _____ application.
☒ Declaration and power of attorney.
☐ Verified statement(s) to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
☒ An Information Disclosure Statement.
☒ Request to Claim Priority

The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)	SMALL ENTITY			OTHER THAN SMALL ENTITY	
FOR:	NO. FILED	NO. EXTRA	RATE	FEE	OR	RATE	FEE
BASIC FEE					OR		\$690.00
TOTAL CLAIMS	39- 20 = 19	19	x 9		OR	19 x 18	\$342.00
INDEP. CLAIMS	11 - 3 = 8	8	x 39		OR	8 x 78	\$624.00
MULTIPLE DEPENDENT CLAIM PRESENTED			x 130		OR	x 260	
ASSIGNMENT(S) RECORDATION FEE(S)			x 40			1 x 40	\$40.00
* If the difference in Col. 1 is less than zero, enter "O" in Col. 2			TOTAL		OR	TOTAL	\$1696.00

THE HONOURABLE ASSISTANT COMMISSIONER FOR PATENTS

Page 2

- ☐ Please charge our Deposit Account No. _____ in the amount of \$ _____. A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$1696.00 is enclosed to cover the filing fees and assignment recordal fee.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 19-2548. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☒ Any patent application processing fees under 37 CFR 1.17.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 19-2548. A duplicate copy of this sheet is enclosed.
- ☒ Any patent application processing fees under 37 CFR 1.17.
- ☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).
- ☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,



Matthew Zischka
Registration No. 41,575

SMART & BIGGAR
438 University Avenue
Suite 1500, Box 111
Toronto, Ontario
Canada M5G 2K8
Telephone: (416) 593-5514
Facsimile: (416) 591-1690

July 7, 2000
Enclosures
(91436-195 MZ/kek)

000720 94627960

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: ASYNCHRONOUS PAYLOAD MAPPING USING
DIRECT PHASE TRANSFER

APPLICANT: Matthew D. BROWN, Colin G. KELLY,
Phil CAMPBELL, and Tony BITZANIS

ASYNCHRONOUS PAYLOAD MAPPING USING DIRECT PHASE TRANSFER

FIELD OF THE INVENTION

The present invention relates to digital networks, more specifically to transfer of data through asynchronous mapping of data and regenerating the corresponding clock using directly transferred phase information.

BACKGROUND OF THE INVENTION

Where several low-speed data streams (tributaries) are to be sent on one high-speed data stream (carrier), there is a need for a multiplexer. A multiplexer serves the purpose, at a sending end, of arranging data from a number of tributaries into a single, complex signal that modifies a carrier wave. At the receiving end, the individual tributaries are regenerated into separate signals.

When data is transmitted using a bandwidth normally used for one telephone voice channel, a standard digital transmission rate may be used, called DS-0. Generically, digital signal X (DS-X) is a term for a series of standard digital transmission rate or levels based on DS-0, which has a transmission rate of 64 Kbps. Both the North American T-carrier system and the European E-carrier systems of transmission operate using the DS series as a base multiple. DS-0 is the base for the digital signal X series. DS-3, the signal in the T-3 carrier, carries a multiple of 28 DS-1 signals or 672 DS-0s and has a net rate of 44.736 Mbps.

Streams of digital data in communication systems are often broken up into "octets" which are sequences of eight bits, which may also be called bytes. The North American standard for digital networks that employ optical fiber is called synchronous optical network (SONET) while the European standard is called synchronous digital hierarchy (SDH). Both use octet multiplexing to create a higher-speed stream from lower-speed tributary signals.

In octet multiplexing, successive time slots on the carrier are allocated to octets from different tributaries. In a SONET based transmission system, the output of the multiplexer may be a "Synchronous Transport Signal Level 1 (STS-1)" signal with a basic bit rate of 51.84 Mbps. A standard STS-1 frame consists of 6480 bits or 810 octets and is 125 μ s in duration. The time slots containing octets (or bytes) may be seen to be a frame organized in rows and columns, for STS-1 specifically, nine rows and 90 columns. Not all of an STS-1

frame is payload (corresponding to data from tributaries), as 36 octets (three columns) are reserved for overhead information used for such purposes as frame identification and monitoring of errors. The other 87 columns comprise a synchronous payload capacity. Into the capacity will be mapped an 87 column synchronous payload envelope (SPE). Typically, the SPE consists of one column of path overhead and 86 columns of payload.

At a sending end, octets from a tributary are mapped into an SPE. Typically the clock of a mapping processor at the sending end is synchronous with the clock of the outgoing transport signal. Note that once an SPE has been mapped into an STS-1 frame, multiple STS-1 frames may be multiplexed together into a higher order signal, such as STS-3. At a receiving end, octets from a specific tributary are de-mapped from an SPE, received at a corresponding elastic store or FIFO (first in first out) buffer and then output from the buffer with timing from a clock local to the receiver. Typically the clock of a de-mapping processor at the receiver is synchronous with the clock of the incoming transport signal. However, there may be transitions in the path between the sending end and the receiving end whereat one or more SPE's within STS-1 frames are passed to a new transport (STS-N). Unfortunately, the clocks at these transitions may not be synchronous. As a result of this asynchrony, the phase of a clock at the receiving end may be receding or advancing relative to the corresponding clock at the sending end.

One challenge is to regenerate the sending end clock from the de-mapped stream of data while minimizing jitter and wander (where wander may be considered a low frequency form of jitter). Methods for mapping one rate or format into another are well known. Specifications of methods for mapping the common asynchronous transmission formats (DS0, DS1, DS2, DS3, etc) into SONET are described in detail in "Synchronous Optical Network (SONET) Transport Systems: Common Generic Criteria, Technical Reference TR-NWT-000253, Issue 2 (Dec. 1991), Bell Communications Research, Inc." (the contents of which are incorporated herein by reference). Similar mapping methods are defined for the European Telecommunications Standardization Institute (ETSI) hierarchy mapping into SDH. Also, optical transmission equipment may map one proprietary format into another. For example, Nortel FD-565 (from Nortel Networks Corporation of Montreal, Canada) can carry a FD-135 proprietary format as well as the DS-3 standard format.

Specifically, for mapping DS-3 into STS-1 a mapping technique must be used that compensates for timing variations due to the asynchronous nature of the DS-3 signal. Usually an asynchronous stuffing bit is added in each SPE row while fixed stuffing bits are added to fill the STS-1 frame.

5 These methods are each optimized for the mapping of particular formats, and cannot be used to map rates that vary significantly from the standard. These mappings are also each precisely tuned for the particular format and bit-rate that is being mapped, plus or minus a tolerance such as 20 parts per million on the bit rate. A signal that has a bit rate even 1% different than that of a DS-3 may not be transported, using these methods, within SONET. A different hardware unit is generally required to perform the mapping of each format of signal. Thus the standards have allowed transportation of a very specific set of signals with format specific hardware.

When known mapping techniques are adapted to achieve low amounts of jitter at the far end, given that a clock is regenerated from the de-mapped stream of data, the jitter may approach the maximum spacing that occurs between data chunks (e.g., bits, bytes, etc.).

Rather than mapping to minimize jitter, an alternative solution is to filter the regenerated clock with a very low bandwidth phase locked loop (PLL). This requires a voltage controlled crystal oscillator (VCXO) based analog PLL or a crystal oscillator (XO) based, digitally controlled PLL, each of which introduce cost and complexity issues. Further, the low bandwidth associated with these solutions make addressing frequency steps, that may occur on the tributary signal, challenging. To accommodate this, a larger FIFO is required, making implementation slightly more expensive and extending latency.

There remains a need for an efficient method for mapping, using inexpensive hardware, arbitrary signals into SONET (and other formats) such that the signals can be recovered with low timing jitter.

SUMMARY OF THE INVENTION

The present invention involves the passing of clock information from a point where a tributary payload is mapped into a carrier to a point where a tributary payload is de-mapped from the carrier. Rather than sending clock phase information implicitly by means of the data,

as is normally the case, clock information is sent explicitly, independent from the payload data. Also, the clock information is used when mapping the data into the payload area of a defined structure.

In accordance with an aspect of the present invention there is provided, at a near end of a transmission system, a method of mapping client data into an outgoing block, the outgoing block including payload words and overhead words, so as to transfer the client data and clock synchronization information associated with the client data to a far end of the transmission system. The method includes receiving client words of an incoming flow of the client data, generating fill words and mapping the payload words into the outgoing block, where each of a first plurality of the payload words comprises one of the client words and each of a second plurality of the payload words comprises one of the fill words. The method further includes adjusting a rate at which the client words are mapped such that an average number of the client words mapped is equal to an average number of the client words received, including an indication of the rate in the overhead words and mapping the overhead words into the outgoing block. In another aspect of the present invention a mapping processor is provided to carry out this method. In a further aspect of the present invention there is provided a software medium that permits a general purpose computer to carry out this method.

In accordance with another aspect of the present invention there is provided a method of regenerating a clock associated with a tributary signal, the method including generating a local synchronization signal, receiving a block of words, the block comprising overhead words and payload words, de-mapping, from the block, an overhead word including an offset indicator, altering the generating using the offset indicator to obtain an altered local synchronization signal and synthesizing the clock associated with the tributary signal using the altered local synchronization signal. In another aspect of the present invention a de-mapping processor is provided to carry out this method. In a further aspect of the present invention there is provided a software medium that permits a general purpose computer to carry out this method.

In accordance with a further aspect of the present invention there is provided a computer data signal embodied in a carrier wave including words from a flow of data

received at a mapping processor and a value of a synchronization signal generated at the mapping processor.

Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

In the figures which illustrate an example embodiment of this invention:

FIG. 1 is a schematic illustration of a multiplexed network;

FIG. 2 is a diagrammatic illustration of the structure of an STS-1 frame;

FIG. 3 is a schematic illustration of the near end of the multiplexed network of FIG. 1;

FIG. 4 is a schematic illustration of the far end of the multiplexed network of FIG. 1;

FIG. 5 is a diagrammatic illustration of the structure of a payload envelope generated in accordance with an embodiment of the present invention;

FIG. 6 is a schematic illustration of an ingress mapper for use in the near end of FIG. 3 in accordance with an embodiment of the present invention;

FIG. 7 is a schematic illustration of a loop filter for use in the ingress mapper of FIG. 6 in accordance with an embodiment of the present invention;

FIG. 8 is a schematic illustration of a mapping accumulator for use in the ingress mapper of FIG. 6 in accordance with an embodiment of the present invention;

FIG. 9 is a schematic illustration of a mapper for use in the ingress mapper of FIG. 6 in accordance with an embodiment of the present invention;

FIG. 10 is a schematic illustration of an egress de-mapper for use in the far end of FIG. 4 in accordance with an embodiment of the present invention;

FIG. 11 is a schematic illustration of a de-mapper for use in the egress de-mapper of FIG. 10 in accordance with an embodiment of the present invention;

FIG. 12 is a schematic illustration of a de-mapping accumulator for use in the egress de-mapper of FIG. 10 in accordance with an embodiment of the present invention;

FIG. 13 is a schematic illustration of a smoother and synthesizer for use in the egress de-mapper of FIG. 10 in accordance with an embodiment of the present invention;

5 FIG. 14 is a schematic illustration of a mapping of information into overhead fields of the payload envelope of FIG. 5 in accordance with an embodiment of the present invention; and

FIG. 15 is a schematic illustration of a generic non-gapping accumulator for use in the ingress mapper of FIG. 6 and the egress de-mapper of FIG. 10 in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referencing FIG. 1, a multiplexed network 100 is illustrated. At a near end 112, a number of discrete optical signals, each carrying a stream of bits (tributary or client data), are processed by a group of near end mapping processors 102A, 102B, 102C...102Z. Data from each tributary is multiplexed into a single stream of bits (carrier), by a multiplexer (MUX) 104, and the single stream is sent over a network 106 to a far end 114. A de-multiplexer (DE-MUX) 108, at far end 114, separates out the data specific to each tributary and passes each data tributary to a group of far end de-mapping processors 110A, 110B, 110C...110Z from which optical signals, each carrying a tributary stream of bits, are output. Note that network 106 could be any network that carries a signal synchronously from one point to another, including SONET, SDH and PDH (plesiochronous digital hierarchy, i.e. almost synchronous). It may also be a direct connection between two points.

Exemplary processors 102A, 110A may be programmable logic such as a field programmable gate array (FPGA), a programmable logic device (PLD) or a fixed implementation such as an Application Specific Integrated Circuit (ASIC) or an analog circuit. Alternatively, exemplary near end mapping processor 102A may be loaded with software for executing a mapping method in accordance with an embodiment of this invention from software medium 116. Similarly, exemplary far end de-mapping processor 110A may be loaded with software for executing a clock regeneration method in accordance

with an embodiment of this invention from software medium **118**. Software media **116, 118** could be disk, tape, chip or random access memory containing a file downloaded from a local or remote source.

FIG. 2 illustrates the structure of an STS-1 frame **200** wherein transport overhead **202** is identified as well as payload capacity **204**. An SPE is shown in payload capacity **204**, including a path overhead column **206** and 86 columns of payload **208**. Note that, although the SPE is shown with an origin at the first column of the first row of payload capacity **204**, the SPE may have an origin arbitrary placed within STS-1 frame **200**, with the SPE origin noted with transport overhead **202**.

At a far end, the timing of the output data stream of each tributary is not determined directly from the timing of the carrier signal from which it is de-multiplexed. Rather, signal processing performed at a near end employing the present invention involves including clock information (frequency and phase) in the data that is multiplexed and sent over the network. Processing performed at a far end employing the present invention extracts the included clock information to output a stream of bits with timing much closer to that of the original tributary clock than that available using known methods.

Consider a single tributary. Tributary data is mapped by a near end mapping processor **102** (FIG. 1) into a block of data which includes information (overhead) about the data in the block. A block of data may be an SPE or several blocks may fit into an SPE. The present invention makes use of the system clock at the near end and at the far end. It is initially assumed, as is typically the case, that these system clocks have similar frequencies, which frequencies are higher than the frequency of the tributary clock. At the near end, for each tributary, the serial data from the tributary is converted to parallel data and the tributary clock is commensurately stepped-down. A clock, used as a timing signal to map tributary data into an outgoing block, is synthesized at the near end based on the system clock stepped down by an accumulator, i.e. the synthesized clock begins a new period at each carry of the accumulator. The nominal carry rate is determined by a selection of the size (M bits) of the accumulator and a number (Y_{NOM}). M and Y_{NOM} are selected so that the average or mean rate at which tributary (client) data arrives at near end mapping processor **102** (FIG. 1) approximates the rate at which tributary (client) data is mapped into an outgoing block, despite the intermittent mapping of block overhead. The two rates are monitored to obtain

frequency offset information (Y_{OFF}) which is used to exact the approximation. Since the far end has a similar system clock, Y_{NOM} may be sent (i.e. included in block overhead) so that a clock may be synthesized (using an M bit accumulator) at the far end to recreate the synthesized clock of the near end. A frequency offset indicator (Y_{OFF}) is sent to maintain the accuracy of the recreation. The recreated synthesized clock may then be used to obtain an exact stepped-down tributary clock and, consequently, an exact tributary clock.

As phase and frequency errors may occur between the clock generators at the near and far ends, a synchronization indicator may also be included in the block overhead, the synchronization indicator taking the value of the near end accumulator at a specific position in the frame. The value of the far end accumulator at the specific position in the frame may be compared to the synchronization indicator to give a difference value, and corrections made to the far end accumulator as necessary. So that a transmission error does not result in the far end accumulator being unduly corrected, corrections to the far end accumulator may be delayed until consecutive difference values are equal. Thus indicating a consistent difference between the near end accumulator and the far end accumulator.

Further refinements may be required in view of pointer adjustments, as described hereinafter.

In FIG. 3, as in subsequent FIGS., components like those in previous FIGS. have like reference numerals. Each parallel connection (i.e., N-bit bus) between components is associated herein with a symbol indicating a number of bits. In many practical cases, the number of bits carried by each parallel connection will be eight and this value will be used to facilitate understanding of the examples. As it may not necessarily be the case that a parallel connection carries eight bits, each such connection has been labeled individually (N1, N2, N3...) and it will be understood that individual parallel connections may carry different numbers of bits. Further, some connections may be serial rather than parallel, obviating the need for serializers and de-serializers. Connections that pass a clock signal from one component to another are presented herein as dashed lines.

FIG. 3 illustrates near end 112 of multiplexed network 100 (FIG. 1). As in a typical multiplexed network, an optical signal, which transmits data serially, is input to one of a group of optical to electrical converters 302A, 302B, 302C...302Z. The electrical data

signals at the output of each converter are input to a corresponding clock and data recovery unit **316A, 316B, 316C...316Z** at which a tributary clock is determined from the data signal. Note that, in some cases, the input signal to near end mapping processor **102** (FIG. 1) will be electrical, rather than optical, and the need for optical to electrical converter **302** will be obviated. Each clock and data recovery unit outputs both tributary clock and tributary data to a corresponding de-serializer **314A, 314B, 314C...314Z**. Tributary data that is received one bit at a time, with timing defined by tributary clock **326A**, at an input to de-serializer **314A**, for instance, is output in parallel, for instance eight bits at a time, at a rate eight times slower than the input data stream, along with a stepped-down clock signal **328A** which completes one cycle for every eight cycles completed on tributary clock **326A**. The output (clock and data) of each de-serializer **314A, 314B, 314C...314Z** is received by an ingress mapper **312A, 312B, 312C...312Z**. An exemplary ingress mapper **312A** receives stepped-down clock signal **328A** along with data words and outputs output words to a MUX **304** when permitted or enabled to do so by MUX **304**. The output words are used by MUX **304** to create a frame of data according to a protocol for doing so. Output from ingress mapper **312A**, for instance, includes block overhead (data specific to the tributary data and information about stepped-down clock **328A**) and payload (tributary or client data and fill). MUX **304** adds overhead information to interleaved output from each ingress mapper **312A, 312B, 312C...312Z** to form a frame of data. The frame is then transmitted over network **106** (FIG. 1).

Turning to FIG. 4, illustrating far end **114** of multiplexed network **100** (FIG. 1), a DE-MUX **408**, receives frames transmitted over network **106** by near end **112**. DE-MUX **408** separates payload envelopes specific to each tributary and forwards the payload envelopes to a corresponding egress de-mapper **412A, 412B, 412C...412Z**. Payload envelopes received by an exemplary egress de-mapper **412A** are processed to determine which words are block overhead data (including clock information) and which words are payload. The clock information is used to synthesize a clock with essentially the same frequency and phase as the tributary clock of the original tributary data. For this example, synthesized clock **426A** approximates tributary clock **326A** (FIG. 3) that was determined by clock and data recovery unit **316A** (FIG. 3). The synthesized clock is output from egress de-mapper **412A, 412B, 412C...412Z** to a corresponding serializer **414A, 414B, 414C...414Z**. Serializer **414A**, for example, uses the synthesized clock to generate a synthesized stepped-down clock at a rate eight times slower for passing back to egress de-mapper **412A** where it is used to time the

output, to serializer **414A**, of words of tributary data. Tributary data is then passed, bit-by-bit, from serializer **414A**, **414B**, **414C**...**414Z** to a corresponding electrical to optical converter **410A**, **410B**, **410C**...**410Z**, with timing gleaned from the synthesized clock. Each electrical to optical converter **410A**, **410B**, **410C**...**410Z** outputs an optical signal modulated by the tributary data received (electrically) from a corresponding serializer. Note that, in some cases, the preferred output signal from far end mapping processor **110** (FIG. 1) will be electrical, rather than optical, and the need for electrical to optical converter **410** will be obviated. For reasons described hereinafter, in addition to data words, exemplary egress de-mapper **412A** receives from DE-MUX **408** a word extraction opportunity signal, an SPE start signal, frame position information and two pointer adjustment (PA) signals, one for positive adjustments and one for negative adjustments.

The structure of an exemplary SPE generated in accordance with an embodiment of the present invention may be considered in view of FIG. 5. An SPE **500** may be designed to fit into payload capacity **204** of a STS-1 frame **200** (see FIG. 2). SPE **500** may be comprised of one column of path overhead **502**, three columns of block overhead **504** and 83 columns of payload **506** from a single tributary. Note that any given row of SPE **500** includes both overhead (path in column **502** and block in column **504**) and payload (in column **506**). Note also that path overhead column **502** corresponds to path overhead column **206** (FIG. 2).

Interconnections of components comprising ingress mapper **312** (FIG. 3) are illustrated in FIG. 6. A FIFO (first-in-first-out buffer) **602** receives input from de-serializer **314** including data words and a stepped-down clock which indicates to FIFO **602** the timing of the incoming data words. Data words are output from FIFO **602** to a mapper **612** with timing determined by a "ready for new word" timing signal **618** received from mapper **612**. "Ready for new word" signal **618** is essentially a gapped clock signal, with an overall rate similar to the rate of the stepped-down clock. Any difference between the timing of the data words input to FIFO **602** and the data words output from FIFO **602** is determined by a phase comparator **604**. Effectively, phase comparator **604** keeps a running value of a difference of words input to and output from FIFO **602**. Periodically, say at the system clock rate, the difference value is output to a phase filter **606** as a value representative of the timing difference, herein called "phase". Filtered phase, which may be a windowed average of the timing difference, calculated in a running manner at the system clock rate or, say, once per row, is passed from phase filter **606** to a loop filter **608**. (The calculation may be performed

once per row by virtue of the mapper counting up to the number of words in a row; the manner in which the mapper counts is described in conjunction with FIG. 9.) A frequency offset indicator (Y_{OFF}) is determined by loop filter 608 based on the filtered phase and this is passed to a summer 609. The output of loop filter 608 may be updated once per row of a payload envelope. A value (Y_{NOM}) stored in a nominal frequency register 616 is added to the frequency offset indicator by summer 609 and a “total frequency” output of summer 609 is input to a mapping accumulator 610. The value for nominal frequency is chosen so that the accumulator generates a carry at a rate nominally equal to the word rate of the input signal. The accumulator 610 will increase its output value by the total frequency input value at each byte clock cycle when enabled to do so. For an M -bit mapping accumulator 610, a carry will be generated every time the sum of the value at the input and the accumulated value exceeds 2^M-1 .

While enabled to do so by a payload insertion opportunity signal 620 from mapper 612, mapping accumulator 610 outputs to mapper 612 a data insertion flag 624 when each carry is generated by the accumulator. Mapper 612 continuously generates payload insertion opportunity signal 620 when the next word to be output to MUX 304 is payload. Mapper 612 generates a “ready for new word” timing signal 618 in synchronism with these data insertion flags 624. That is, a rising edge of “ready for new word” timing signal 618 is triggered by receipt of a high on data insertion flag 624. The output of loop filter 608 and nominal frequency register 616 are also passed to mapper 612 where they are included as block overhead in an outgoing block of data (for use in regenerating a close approximation of the tributary clock for the tributary data with which they are associated). Mapper 612 passes output words to MUX 304 when given the opportunity to do so by MUX 304 via received word insertion opportunity signals. Words output from mapper 612 make up a block such as SPE 500 (FIG. 5) that includes both payload and overhead (path, block) words.

Phase filter 606, loop filter 608, accumulator 610 and mapper 612 may be said to define a feedback loop controlling “ready for new word” signal 618 to control the output of phase comparator 604.

The design of loop filter 608, illustrated in detail in FIG. 7, sets a dynamic response for a feedback loop defined by phase filter 606, loop filter 608, accumulator 610 and mapper 612. The dynamic response may be represented by the bandwidth and damping factor of the

loop. An integration path, comprising an adder **704**, a storage element **706** and an integral amplifier **708**, is required in order to achieve frequency tracking with zero mean phase error while a proportional path, comprising a proportional amplifier **702**, stabilizes the loop and sets the loop bandwidth. As will be apparent to a person skilled in the art, other arrangements of loop filter **608** may perform the same function.

Turning to FIG. **8** in conjunction with FIG. **6**, the operation of mapping accumulator **610** may be examined in detail. A byte clock controls the timing of mapping accumulator **610**. The byte clock frequency is the frequency at which all words (transport overhead, path overhead, block overhead and payload) are mapped to an outgoing frame of a particular format (say, STS-1). It may also be said that the byte clock frequency is the bit frequency of the format of the outgoing frame (51.84 MHz for STS-1) divided by the number of bits in a word, which is eight in the case of bytes. On each tick of the near end byte clock and while enabled, an M bit summer **802** adds a total frequency received from summer **609** and an M -bit synchronization indicator or “sync” value (X) received at X from register **804**. The “sync” value represents the M bit sum in the summer **802** which was most recently stored by register **804**. Output of summer **802**, including M bit sum at Z and a carry bit at C , is passed to register **804** which outputs the values present at its inputs in response to payload insertion opportunity signal **620** received at an “enable” input. Register **804** outputs an M bit synchronization signal **622** and data insertion flag **624** to mapper **612**. Data insertion flag **624** is a single bit taking its value from the carry bit of summer **802**. As described hereinafter, passing the sync value, determined by sampling synchronization signal **622** at a specific position in the frame, to the far end allows the far end to synchronize the M bit sum in its accumulator with that in the near end accumulator. The specific position in the frame at which the sync value is determined may be arbitrarily decided upon by a designer of a transmission system using the present invention. It may be, for instance, the point in time corresponding to the beginning of the first payload word in a frame.

When designing accumulator **610**, the size M may be chosen arbitrarily, though a greater M leads to greater control over jitter. The value Y_{NOM} stored in nominal frequency register **616**, is partially determined by the size of accumulator **610** (i.e. the value of M). Also involved in the determination of Y_{NOM} is near end byte clock frequency (F_{BYTE}). Other factors determining the value Y_{NOM} include data word size ($N1$) and frequency of the tributary being

mapped (F_{TRIB}). The preferred frequency with which accumulator **610** rolls over (F_{OUT}) may be given by

$$F_{OUT} = \frac{F_{TRIB}}{N1} = F_{BYTE} \frac{Y_{NOM}}{2^M}.$$

Solving for Y_{NOM} gives

$$Y_{NOM} = \text{round}\left(\frac{F_{OUT}}{F_{BYTE}} 2^M\right),$$

where the “round” function rounds a real number argument to the nearest integer and is used to ensure that Y_{NOM} is an integer. By way of example, consider a DS-3 tributary ($F_{TRIB} = 44.736$ MHz) being mapped eight bits at a time ($N1=N5=N2=8$) by ingress mapper **312** with a byte clock frequency (F_{BYTE}) of 6.48 MHz (51.84/8 for STS-1) and a 16-bit mapping accumulator ($M=16$). In this example, a value of 56555 is appropriate for loading into nominal frequency register **616** for Y_{NOM} . However, not all words output from ingress mapper **312** are payload. Consequently, a nominal frequency number which takes into account the presence of block overhead words may be given by

$$Y_{NOM} = \text{round}\left(\frac{F_{OUT}}{F_{BYTE}} 2^M \frac{A}{B}\right)$$

where A is the number of bytes per block and B is the number of payload bytes per block. Note that, as Y_{NOM} must be an integer, there will normally be a difference between an ideal total frequency and Y_{NOM} .

The nature of words output from mapper **612** may be discussed in detail while reviewing FIG. 9, which illustrates the inter-relation of components of mapper **612**, in conjunction with FIGS. 3 and 6. An indication of the start of a block (SPE) is received at a frame position counter **908**, from MUX **304**. Frame position, maintained by counter **908** based upon subsequently received word insertion opportunity signals, also received from MUX **304**, is passed to both a protocol specific overhead generator **906** and a mapping logic unit **902**. Mapping logic unit **902** uses the received frame position to control a switch **910** to determine the type of each output word sent to MUX **304**. Input to switch **910** includes data words from FIFO **602**, fill data from a fill unit **904**, a value from nominal frequency register **616**, a frequency offset indicator from loop filter **608**, a sync value from a register **912** and overhead data from protocol specific overhead generator **906**.

When, according to the frame position output from counter **908**, mapper **612** is to map an overhead word to the output, mapping logic unit **902** controls payload insertion opportunity signal **620** to disable updates to accumulator **610**. Conversely, when, according to frame position output from counter **908**, mapper **612** is to map a payload word to the output, mapping logic unit **902** controls payload insertion opportunity signal **620** to enable updates to accumulator **610**. In the latter case, when a word insertion opportunity signal is received from MUX **304** and data insertion flag **624** indicates that data should be inserted, a “ready for new word” signal **618** is sent to FIFO **602** from which is received a word of data then mapped to the output. However, when a word insertion opportunity signal is received from MUX **304**, and data insertion flag **624** does not indicate that data should be inserted, a fill word from fill unit **904** is mapped to the output. Mapping logic unit **902** also controls register **912** to sample sync value **622** at specific position in the frame. The sampled sync value is then held in register **912** so that it may be mapped into overhead.

The performance of components of each egress de-mapper **412** may be discussed in overview with reference to FIG. **10** and FIG. **4**. Words output from DE-MUX **408** are received by a de-mapper **1012** where their type (payload, overhead) is determined. Another signal, “word extraction opportunity”, from DE-MUX **408** assists de-mapper **1012** in the determination. To a FIFO **1002** de-mapper **1012** passes data words and a “ready to transfer next word” local timing signal **1018**. Nominal frequency value, Y_{NOM} , and frequency offset indicator, Y_{OFF} , both extracted from overhead words received by de-mapper **1012**, are sent to a frequency adder **1014** which passes the sum of the two values to a de-mapping accumulator **1010**. De-mapper **1012** communicates with accumulator **1010** by way of sending a payload extraction opportunity signal **1020** and receiving a data extraction flag **1024**. An M bit sync value **1022A** extracted from overhead is passed from de-mapper **1012** to a synchronization processor **1016** where it is compared to a local synchronization signal **1022B** generated by accumulator **1010**. The timing of the comparison is controlled by comparison timing signal **1034** received from de-mapper **1012**. The accuracy of the timing of the comparison is maintained through the receipt, by de-mapper **1012**, of a signal from DE-MUX **408** indicating the beginning of each block (SPE). If far end accumulator **1010** is synchronized with accumulator **610** (FIG. **6**) at the near end, synchronization processor **1016** will find no differences. However, any differences that are discovered may be corrected through a correction signal **1032** passed from processor **1016** to accumulator **1010**. A compensation

processor **1028** receives pointer adjust signals from DE-MUX **408** and a total frequency (nominal frequency value added to frequency offset indicator) from frequency adder **1014**. The output from compensation processor **1028** is a sync offset added, at a sync adder **1030**, to local synchronization signal **1022B** at the output of accumulator **1010**. The output of sync adder **1030** is passed to a smoother and synthesizer **1008**. To achieve a reproduction of the original tributary clock, a stepped-down clock signal **1026** output from smoother and synthesizer **1008** is passed to a clock multiplication unit **1004** that outputs serial clock **426** to serializer **414**. FIFO **1002** receives from serializer **414** a parallel clock which latches out new data words.

Note that, optionally, Y_{NOM} may not be extracted from an incoming payload envelope, rather, a register within de-mapper **1012** may be pre-loaded with a value for Y_{NOM} , determined ahead of time given knowledge of the tributary signal format. Note further that by using direct clock synthesis at the far end rather than using an asynchronous PLL similar to that at the ingress, a common source of jitter is avoided.

As an SPE may not necessarily start at the beginning of the payload area of a frame, provisions exists for a pointer in transport overhead that indicates the position within a frame of the start of a particular SPE. As the frame passes through transitions on the path from sending end to receiving end, timing offset may dictate that the position of the start of a SPE be shifted forward or back by a byte within payload capacity **204** (FIG. 2). It is this pointer adjustment that DE-MUX **408** may be designed to recognize. As an SPE that arrives one word sooner or later can result in transients in local synchronization signal **1022B** at the output of accumulator **1010**, there exists a necessity to address these phase transients. Preferably, egress de-mapper **412** recognizes that a pointer adjustment has occurred, through the receipt of the aforementioned PA signals, compensates for the resulting synchronization error, then slowly bleeds the compensation away. The bleed rate may be, for instance, linear and strike a balance between being fast enough so that the compensation does not accumulate and slow enough that the transient rate is maximally reduced. Optimal performance can be achieved through adaptive means already known and publicized.

The phase transient compensation in de-mapper **412** is performed by compensation processor **1028**. Upon receiving an indication, from DE-MUX **408**, of a positive pointer adjustment, compensation processor **1028** passes a sync offset equivalent to the total

frequency, received from frequency adder **1014**, to sync adder **1030**. Over the far end system clock cycles to follow, the sync offset is gradually reduced from the original value to zero. In the event of a received notification of a negative pointer adjustment, a negatively signed sync offset with a magnitude of the total frequency is passed to sync adder **1030** at first and then gradually the magnitude is reduced to zero.

It should be noted that the structure of de-mapper **1012**, illustrated in detail in FIG. **11**, is intentionally similar to that of mapper **602** (illustrated in FIG. **9**). Words output from DE-MUX **408** enter a switch **1110** which is under the control of a de-mapping logic unit **1102**. Information received from a frame position counter **1108** is used to determine whether a received word is payload or overhead (path or block). Payload words may be output as data words to FIFO **1002** or as fill words to a fill unit **1104**, while overhead words may be output to a protocol specific overhead extractor **1106** or as clock information to adder **1014** (Y_{NOM} , Y_{OFF}) or register **1112** (sync value X). Frame position counter **1108** receives, from DE-MUX **408**, an indication of the start of each block (SPE) and a signal representative of a word extraction opportunity. From these, frame position may be determined and output to overhead extractor **1106** and de-mapping logic unit **1102**. De-mapping logic unit **1102** is also in communication with accumulator **1010** indicating, through payload extraction opportunity signal **1020**, that the current word is payload. If the current word is payload, de-mapping logic unit **1102** may determine whether it is a data word or a fill word by monitoring data extraction flag **1024**. Generation of "ready to transfer next word" signal **1018** by de-mapping logic unit **1102** with timing from data extraction flag **1024** occurs in much the same way as generation of "ready for new word" signal **618** by mapping logic unit **902** with timing from data insertion flag **624**. De-mapping logic unit **1102** also indicates to synchronization processor **1016**, via comparison timing signal **1034**, the correct point within the frame to compare sync values.

Turning to FIG. **12**, which illustrates de-mapping accumulator **1010**, at each tick of a far end system clock, an M bit summer **1202** adds a total frequency (Y) received from adder **1014** to a value (X) currently held in register **1204** and an adjustment input **1032** (W) from synchronization processor **1016**. Output of summer **1202**, including an M bit sum (Z) and a carry bit (C), is passed to register **1204** which outputs the values present at its inputs in keeping with an appropriate signal present at an "enable" input. Register **1204** receives a signal **1020** from mapper **1012**, called a payload extraction opportunity, at the enable input.

When enabled to, register **1204** outputs, to synchronization processor **1016** and adder **1030**, an M bit local synchronization signal **1022B** and a data extraction flag **1024**. Data extraction flag **1024** is a single bit taking its value from the carry bit.

5 Smoother and synthesizer **1008**, which may be examined in detail in FIG. **13**, serves to smooth the output of accumulator **1010** and digitally synthesize stepped-down clock signal **1026** with the same frequency and phase as, for example, stepped-down clock signal **328A** from de-serializer **314A** (FIG. **3**). At a smoothing phase comparator **1302**, the output of a smoothing clock accumulator **1308** is subtracted from a total sync signal (sync offset + local synchronization signal **1022B**) received from adder **1030**. The operation of smoothing clock accumulator **1308** is similar to that of previously described accumulators **610**, **1010**, with the exception that a register with corresponding enable is unnecessary. This exception gives the output of smoothing clock accumulator **1308** a “free-running” quality (i.e. there are no gaps). The result of the subtraction is passed to a smoothing phase filter **1304** which outputs a running average of the difference value to a smoothing loop filter **1306** where it is used to generate a value input to smoothing clock accumulator **1308**. The smoothing feedback loop, defined by smoothing phase filter **1304**, smoothing loop filter **1306** and smoothing clock accumulator **1308**, creates an output of smoothing clock accumulator **1308** that has a frequency approximating that of the near end stepped-down clock. The output of clock accumulator **1308** is passed back to smoothing phase comparator **1302** as well as to sine look-up circuit **1310** whose output is passed to a high speed digital-to-analog converter (DAC) **1312**. Sine wave like analog output from converter **1312** is received by a quantization filter and limiter **1314** where it is also limited such that a square wave is present at the output. The output **1026** of filter **1314**, which is a scaled version of an approximation (in phase and frequency) of the near end stepped-down clock signal, is passed to clock multiplication unit **1004**.

20 An example mapping of information into tributary specific overhead fields **502** of frame **500** (FIG. **5**) is illustrated in FIG. **14**. It can be seen in this example that a frequency offset indicator is sent in columns 2 and 3 of every row as ACCYOFFH and ACCYOFFL, the high and low word respectively. For a configuration in which Y_{OFF} is represented by a 16-bit value, , the high word is the eight most significant bits and the low word is the eight least significant bits. As it is crucial that Y_{OFF} be received at the egress end free of errors, for the 16-bit configuration, seven bits may be used to convey Y_{OFF} while the remaining nine bits are

used for error detection and correction. A 15-bit code word may be used implementing a BCH(15,7) code word, where eight redundant bits allow correction of up to two errors and detection of up to three errors. The remaining bit is a simple parity bit which allows detection of any odd number of errors. Information sent in column 4 need not be updated as frequently as the frequency offset indicator. ACCYNOMH and ACCYNOML are sent once per frame and hold the high and low words of the nominal frequency value. Also sent once per frame is the output from mapping accumulator **610** (FIG. 6), the high and low words of the sync value are sent in ACCXH and ACCXL respectively, while the carry value is sent as ACCXCARRY. As is the case with Y_{OFF} , it is necessary to ensure reliable reception of Y_{NOM} and sync values at the egress. The suggested method, common in similar communication schemes, is to wait for a number of received samples to agree before proceeding. As will be apparent to a person skilled in the art, the organization of the block overhead words is not limited to the above.

A potential drawback of the method of synchronizing the ingress and egress accumulators outlined above is that there will be gaps, occurring when overhead is being mapped, in which no updates to the accumulator occur. This causes a problem at the egress as follows. Under normal operating conditions, de-mapping accumulator **1010** mimics mapping accumulator **610** (FIG. 6) and phase information determined at the ingress is preserved. However, the typically saw-tooth output of de-mapping accumulator **1010** will have plateaus during periods where register **1204** (FIG. 12) is not enabled. Thus, accumulator **1010** may not be used to directly drive sine look-up circuit **1310** (FIG. 13) and DAC **1312** (FIG. 13), rather an intermediate stage, smoothing phase filter **1304** (FIG. 13), smoothing loop filter **1306** (FIG. 13) and smoothing clock accumulator **1308** (FIG. 13), must smooth out local synchronization signal **1022B**. In an arrangement wherein the gaps are removed, the intermediate stage (smoothing filter) may be eliminated. Note, however, that phase filter **1304** (FIG. 13) may nevertheless be necessary or beneficial for filtering jitter from other sources. A method to regenerate a clock using a non-gapped accumulator follows.

Turning to FIG. 15, consider a non-gapped accumulator **1510**. Note that the inputs and outputs of non-gapped accumulator **1510** are the same as for accumulators **610** (FIG. 8) and **1010** (FIG. 12). However, unlike accumulators **610** and **1010**, non-gapped accumulator **1510** is designed not to overflow. For example, an exemplary 16 bit accumulator may be replaced by a 16+4 bit non-gapped accumulator. Non-gapped accumulator **1510** includes an

$M+m$ bit summer **1502** and a flag control unit **1504**. Summer **1502** operates as known, outputting an $M+m$ bit sum (Z) of the input signals (W, X and Y). Flag control unit **1504** receives output from summer **1502** (ZIN) and outputs an $M+m$ bit synchronization signal (ZOUT) and a data insertion/extraction opportunity flag (C). A signal (payload insertion **620** or extraction **1020** opportunity) from the mapper **612** or de-mapper **1012** indicates to non-gapped accumulator **1510** when the current word is payload. This signal is received at a PAY/OVER input of flag control unit **1504**. When the current word in a given mapper is a payload word, the value at the output of summer **1502** (Z) is checked by flag control unit **1504**. If Z is equal to or larger than a modulus value (MOD) of 2^M , then there is a word ready for transfer and Z is reduced by the modulus value ($ZOUT=ZIN-2^M$). Further, a signal (C) analogous to the carry signal of the gapped accumulator is sent as data insertion flag **624** (FIG. 9) or data extraction flag **1024** (FIG. 11). In the exemplary 16+4 non-gapped accumulator, the modulus value (MOD) is 2^{16} . If Z is less than the modulus then a data insertion flag **624** (FIG. 9) or data extraction flag **1024** (FIG. 11) is not sent and consequently the current byte may be considered to be fill by the logic unit. When the current word is overhead, then non-gapped accumulator **1510** is updated, but at the mapper/de-mapper no subtraction or insertion/extraction occurs. The size of the accumulator must be sufficiently large that it is not possible for the accumulator to overflow given the longest period of non-payload words.

The result of the operation of a non-gapped accumulator is that a mapper may “remember” data insertion opportunities that pass while overhead was being mapped. Having remembered the missed opportunities, the mapper may catch up by mapping data words to output at a rate faster than they arrive at the mapper.

It may be possible to avoid sending sync values in the data frame if the remainder in the accumulator at the near end and far end is deterministic at the beginning of a data transmission, e.g. the accumulators are zeroed at the beginning of each transmission. However, any frequency differences in the near end and far end system clocks could, if large enough, be problematic. Therefore, sending of the sync values is preferred.

Other modifications will be apparent to those skilled in the art and, therefore, the invention is defined in the claims.

We claim:

1 1. At a near end of a transmission system, a method of mapping client data into an outgoing
2 block, said outgoing block comprising payload words and overhead words, so as to transfer
3 said client data and clock synchronization information associated with said client data to a far
4 end of said transmission system, said method comprising:

5 receiving client words of an incoming flow of said client data;

6 generating fill words;

mapping said payload words into said outgoing block, where:

each of a first plurality of said payload words comprises one of said client
words; and

each of a second plurality of said payload words comprises one of said fill
words;

adjusting a rate at which said client words are mapped such that an average number of
said client words mapped is equal to an average number of said client words received;

including an indication of said rate in said overhead words; and

mapping said overhead words into said outgoing block.

1 2. The method of claim 1 wherein said indication of said rate comprises a first value
2 (YNOM) representative of a nominal magnitude of said rate and an indicator (YOFF) of an
3 offset from said nominal magnitude.

1 3. The method of claim 2 further comprising:

2 detecting a difference between a number of said client words received and a number
3 of said client words mapped; and

4 converting said difference to said offset indicator.

1 4. The method of claim 3 further comprising, before said converting, filtering said
2 difference and utilizing said filtered difference to optimize said adjusting of said rate.

1 5. The method of claim 2 further comprising generating a first timing signal, where said
2 mapping said payload words into said outgoing block comprises mapping one of said first
3 plurality of said payload words as triggered by said first timing signal.

1 6. The method of claim 5 wherein said adjusting said rate at which said client words are
2 mapped comprises adjusting said first timing signal.

1 7. The method of claim 5 further comprising:

2 while mapping said payload words into said outgoing block, increasing an
3 accumulated sum in an accumulator, at each tick of a near end system clock, by a sum
4 of said offset indicator and said nominal magnitude of said rate; and

5 responsive to mapping one of said payload words and where said accumulated sum is
6 greater than a pre-set amount, decreasing said accumulated sum by said pre-set
7 amount.

8. The method of claim 7 further comprising, while mapping said overhead words into said
9 outgoing block, increasing said accumulated sum in said accumulator, at each said tick of
0 said far end system clock, by said sum of said offset indicator and said nominal magnitude of
1 said rate.

1 9. The method of claim 7 further comprising:

2 responsive to said decreasing said accumulated sum, generating a flag; and

3 deriving said first timing signal from said flag.

1 10. The method of claim 7 further comprising:

2 determining a synchronization (sync) indicator, at a given point relative to a
3 beginning of a data structure for said outgoing block, for use in synchronizing a
4 second timing signal, at said far end of said transmission system, with said first timing
5 signal; and

6 including said sync indicator in one of said overhead words.

1 11. The method of claim 10 further comprising sampling, at said point relative to said
2 beginning of said data structure, said accumulated sum in said accumulator.

1 12. The method of claim 11 wherein said data structure is a SONET synchronous payload
2 envelope.

1 13. The method of claim 2 further comprising storing said first value representative of said
2 nominal magnitude of said rate.

1 14. The method of claim 2 further comprising:

recovering a clock signal from said incoming flow of client data;

converting said incoming flow of client data from serial bits to said client words; and

converting said clock signal to a parallel clock signal.

15. The method of claim 1 further comprising including error correction and detection
information in said overhead words.

16. A mapping processor comprising:

means for receiving client words of an incoming flow of client data;

means for generating fill words;

means for mapping payload words into an outgoing block, where:

each of a first plurality of said payload words comprises one of said client
words; and

each of a second plurality of said payload words comprises one of said fill
words;

means for adjusting a rate at which said client words are mapped such that an average
number of said client words mapped is equal to an average number of said client
words received;

means for including an indication of said rate in a plurality of overhead words; and

means for mapping said plurality of overhead words into said outgoing block.

17. A mapping processor comprising:

a receiver for receiving client words of an incoming flow of client data;

a fill unit for generating fill words;

a mapping unit for:

adjusting a rate at which said client words are mapped such that an average number of said client words mapped is equal to an average number of said client words received;

including an indication of said rate in a plurality of overhead words;

mapping payload words into an outgoing block, where:

each of a first plurality of said payload words comprises one of said client words;

each of a second plurality of said payload words comprises one of said fill words; and

mapping said plurality of overhead words into said outgoing block.

18. A mapping processor operable to:

receive client words of an incoming flow of client data;

generate fill words;

map payload words into an outgoing block, where:

each of a first plurality of said payload words comprises one of said client words; and

each of a second plurality of said payload words comprises one of said fill words;

adjust a rate at which said client words are mapped such that an average number of said client words mapped is equal to an average number of said client words received;

include an indication of said rate in a plurality of overhead words; and

map said plurality of overhead words into said outgoing block.

19. A computer readable medium for providing program control to a mapping processor, said computer readable medium adapting said processor to be operable to:

receive client words of an incoming flow of client data;

generate fill words;

map payload words into an outgoing block, where:

each of a first plurality of said payload words comprises one of said client words; and

each of a second plurality of said payload words comprises one of said fill words;

adjust a rate at which said client words are mapped such that an average number of said client words mapped is equal to an average number of said client words received;

include an indication of said rate in a plurality of overhead words; and

map said plurality of overhead words into said outgoing block.

20. A method of regenerating a clock associated with a tributary signal, said method comprising:

generating a local synchronization signal;

receiving a block of words, said block comprising overhead words and payload words;

de-mapping, from said block, an overhead word including an offset indicator;
altering said generating using said offset indicator to obtain an altered local
synchronization signal; and
synthesizing said clock associated with said tributary signal using said altered local
synchronization signal.

21. The method of claim 20 further comprising de-mapping, from said block, an overhead
word including a value related to a nominal frequency of a timing signal and wherein said
generating said local synchronization signal further comprises:

while de-mapping said payload words from said block, increasing an accumulated
sum in an accumulator, at each tick of a far end system clock, by a sum of said offset
indicator and said nominal frequency value; and

responsive to de-mapping a payload word and where said accumulated sum is greater
than a pre-set amount, decreasing said accumulated sum by said pre-set amount.

22. The method of claim 21 wherein said generating said local synchronization signal further
comprises, while de-mapping said overhead words from said block, increasing said
accumulated sum in said accumulator, at each said tick of said far end system clock, by said
sum of said offset indicator and said nominal frequency value.

23. The method of claim 21 wherein synthesizing said synthesized clock comprises:

converting said altered local synchronization signal to a converted synchronization
signal; and

deriving said synthesized clock from said converted synchronization signal;

where said converted synchronization signal has a frequency based on a rate at which
said accumulated sum is decreased by said pre-set amount.

24. The method of claim 21 further comprising de-mapping overhead words including
nominal frequency values until consecutively de-mapped nominal frequency values are equal
before said generating a local synchronization signal using said nominal frequency value.

1 25. The method of claim 20 further comprising:

2 generating a timing signal; and

3 de-mapping, from said block, a payload word when triggered by said timing signal,
4 where said payload word includes a word of client data.

1 26. The method of claim 25 further comprising generating a flag and deriving said timing
2 signal from said flag.

1 27. The method of claim 26 wherein said flag is generated in response to an accumulator
2 exceeding a predetermined sum and said timing signal is a gapped clock with a rising edge
3 triggered by said flag.

1 28. The method of claim 25 further comprising converting said word of client data to a serial
2 stream of bits, where said stream of bits has timing derived from said synthesized clock.

1 29. The method of claim 20 further comprising:

2 de-mapping, from said block, an overhead word including a synchronization (sync)
3 indicator;

4 determining a local sync indicator from said altered local synchronization signal
5 corresponding to said de-mapped sync indicator;

6 comparing said local sync indicator with said de-mapped sync indicator to result in a
7 difference value; and

8 altering said generating based upon said difference value.

1 30. The method of claim 29 further comprising, before said altering said generating based
2 upon said difference value, repeating said de-mapping said overhead word including said
3 sync indicator, said determining and said comparing, where said repeating results in a
4 plurality of difference values and said repeating is performed until consecutive ones of said
5 plurality of difference values are equal.

1 31. The method of claim 20 further comprising, before said synthesizing, filtering said altered
2 local synchronization signal.

1 32. The method of claim 20 wherein said synthesizing comprises:

2 generating an approximation of said clock from said synchronization signal;

3 detecting a difference between said clock and said synchronization signal;

4 converting said difference to a frequency offset; and

5 altering said generating said clock by said frequency offset, where said altering serves
6 to minimize said difference.

1 33. The method of claim 20 further comprising,

2 receiving an indication of a pointer adjustment;

3 responsive to said receiving said pointer adjustment, adding a predetermined value to
4 said altered local synchronization signal; and

5 repeating said adding while progressively reducing a magnitude of said predetermined
6 value until said magnitude is zero.

1 34. A de-mapping processor comprising:

2 means for generating a local synchronization signal;

3 means for receiving a block of words, said block comprising overhead words and
4 payload words;

5 means for de-mapping, from said block, an overhead word including an offset
6 indicator;

7 means for altering said generating using said offset indicator to obtain an altered local
8 synchronization signal; and

means for synthesizing said clock associated with said tributary signal using said altered local synchronization signal.

35. A de-mapping processor comprising:

a receiver for receiving a block of words, said block comprising overhead words and payload words;

a de-mapper for de-mapping, from said block, an overhead word including an offset indicator;

a signal source for generating a local synchronization signal where said signal source allows for altering said generating using said offset indicator to obtain an altered local synchronization signal; and

a synthesizer for synthesizing said clock associated with said tributary signal using said altered local synchronization signal.

36. The de-mapping processor of claim 35 wherein said synthesizer comprises an accumulator, a sine lookup circuit, a quantization filter and a limiter.

37. A de-mapping processor operable to:

receive a block of words, said block comprising overhead words and payload words;

de-map, from said block, an overhead word including an offset indicator;

generate a local synchronization signal;

alter said local synchronization signal using said offset indicator to obtain an altered local synchronization signal; and

synthesize said clock associated with said tributary signal using said altered local synchronization signal.

38. A computer readable medium for providing program control to a de-mapping processor, said computer readable medium adapting said processor to be operable to:

receive a block of words, said block comprising overhead words and payload words;

39. A computer data signal embodied in a carrier wave comprising;
words from a flow of data received at a mapping processor; and
an offset indicator generated at said mapping processor.

ABSTRACT

The present invention involves the passing of clock information from a point where a tributary payload is mapped into a carrier to a point where a tributary payload is de-mapped from the carrier. A synchronization signal is generated at the mapping end. Rather than
5 sending clock phase information implicitly by means of the data, as is normally the case, a value of the synchronization signal at a given time, is sent explicitly, independent from the payload data.

000720" 92627960

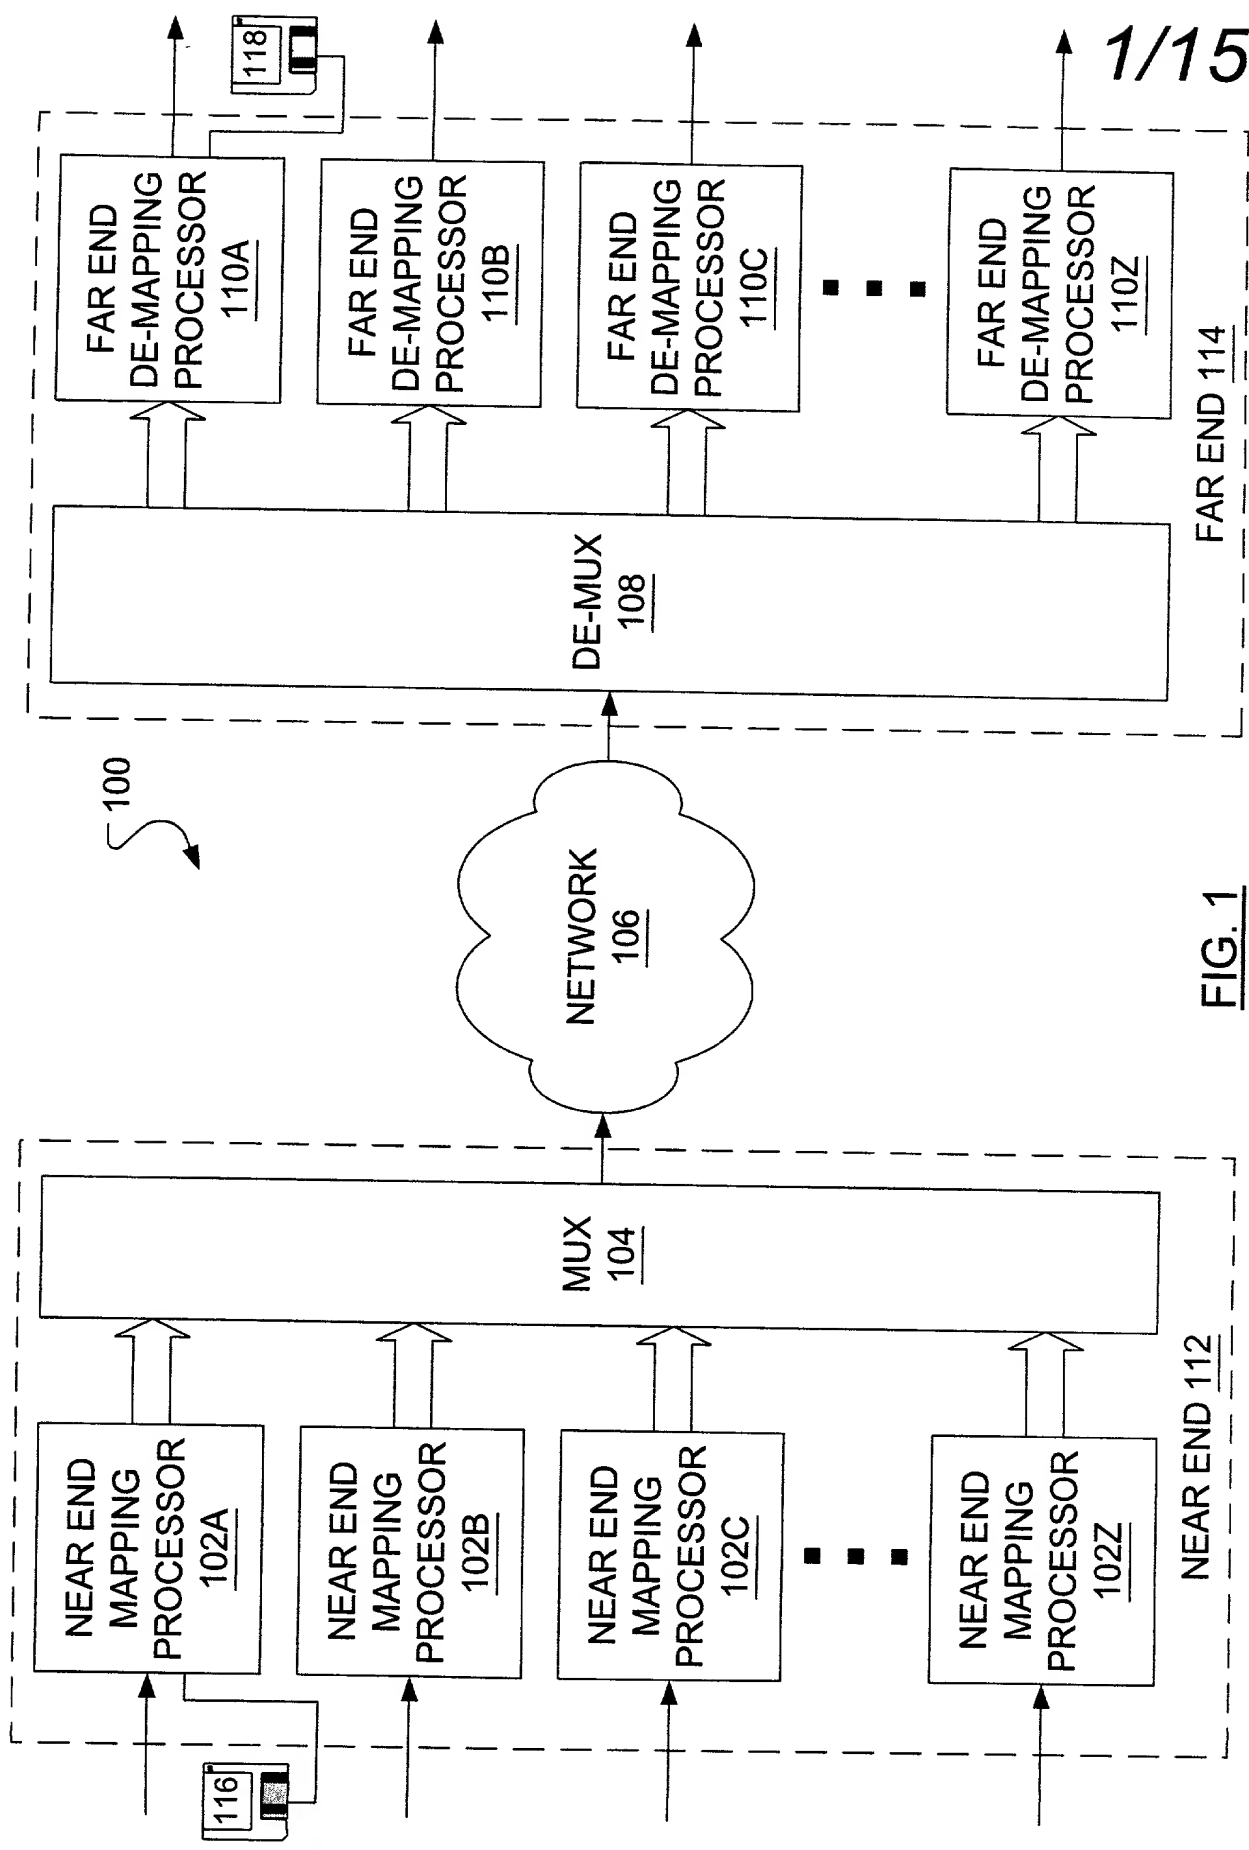
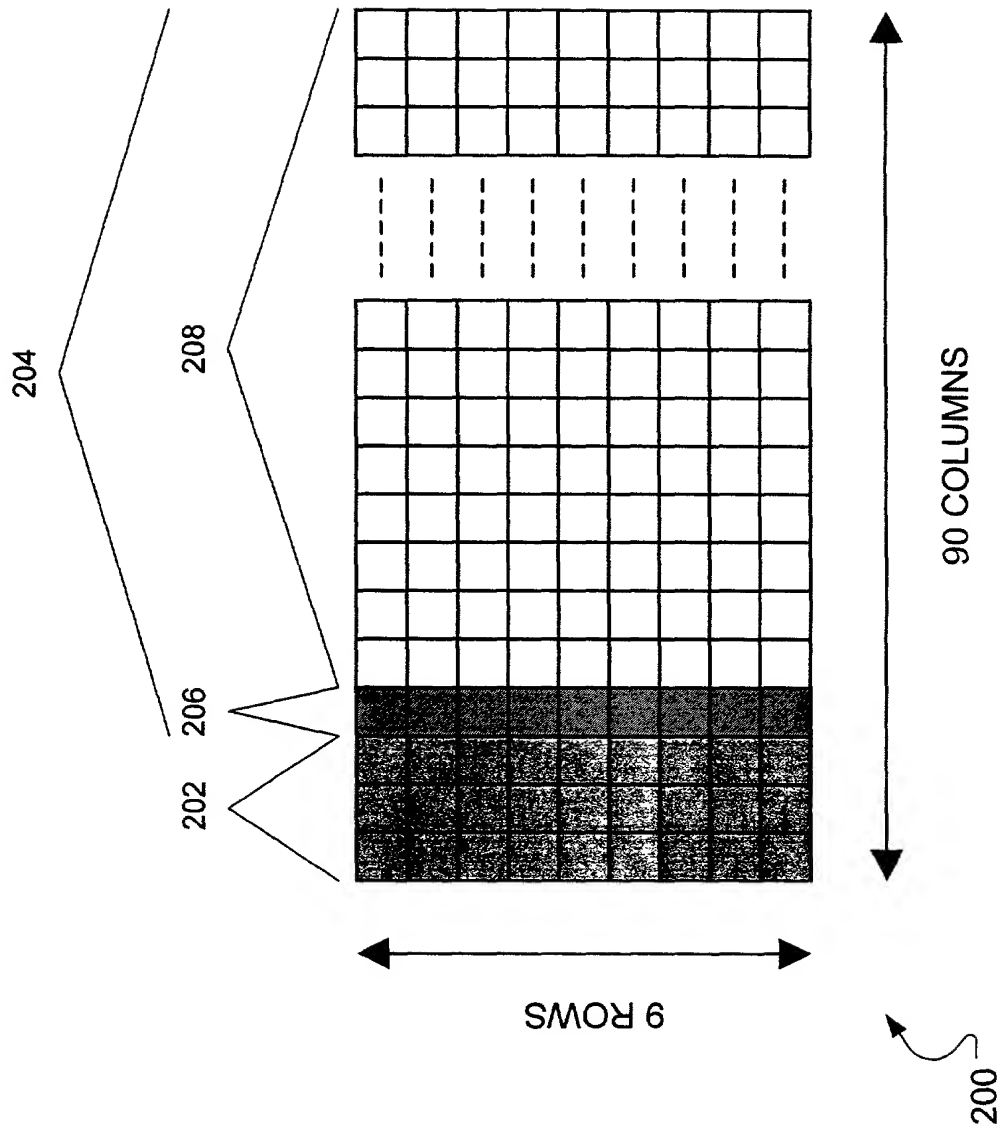


FIG. 1

000T20" 9262T960



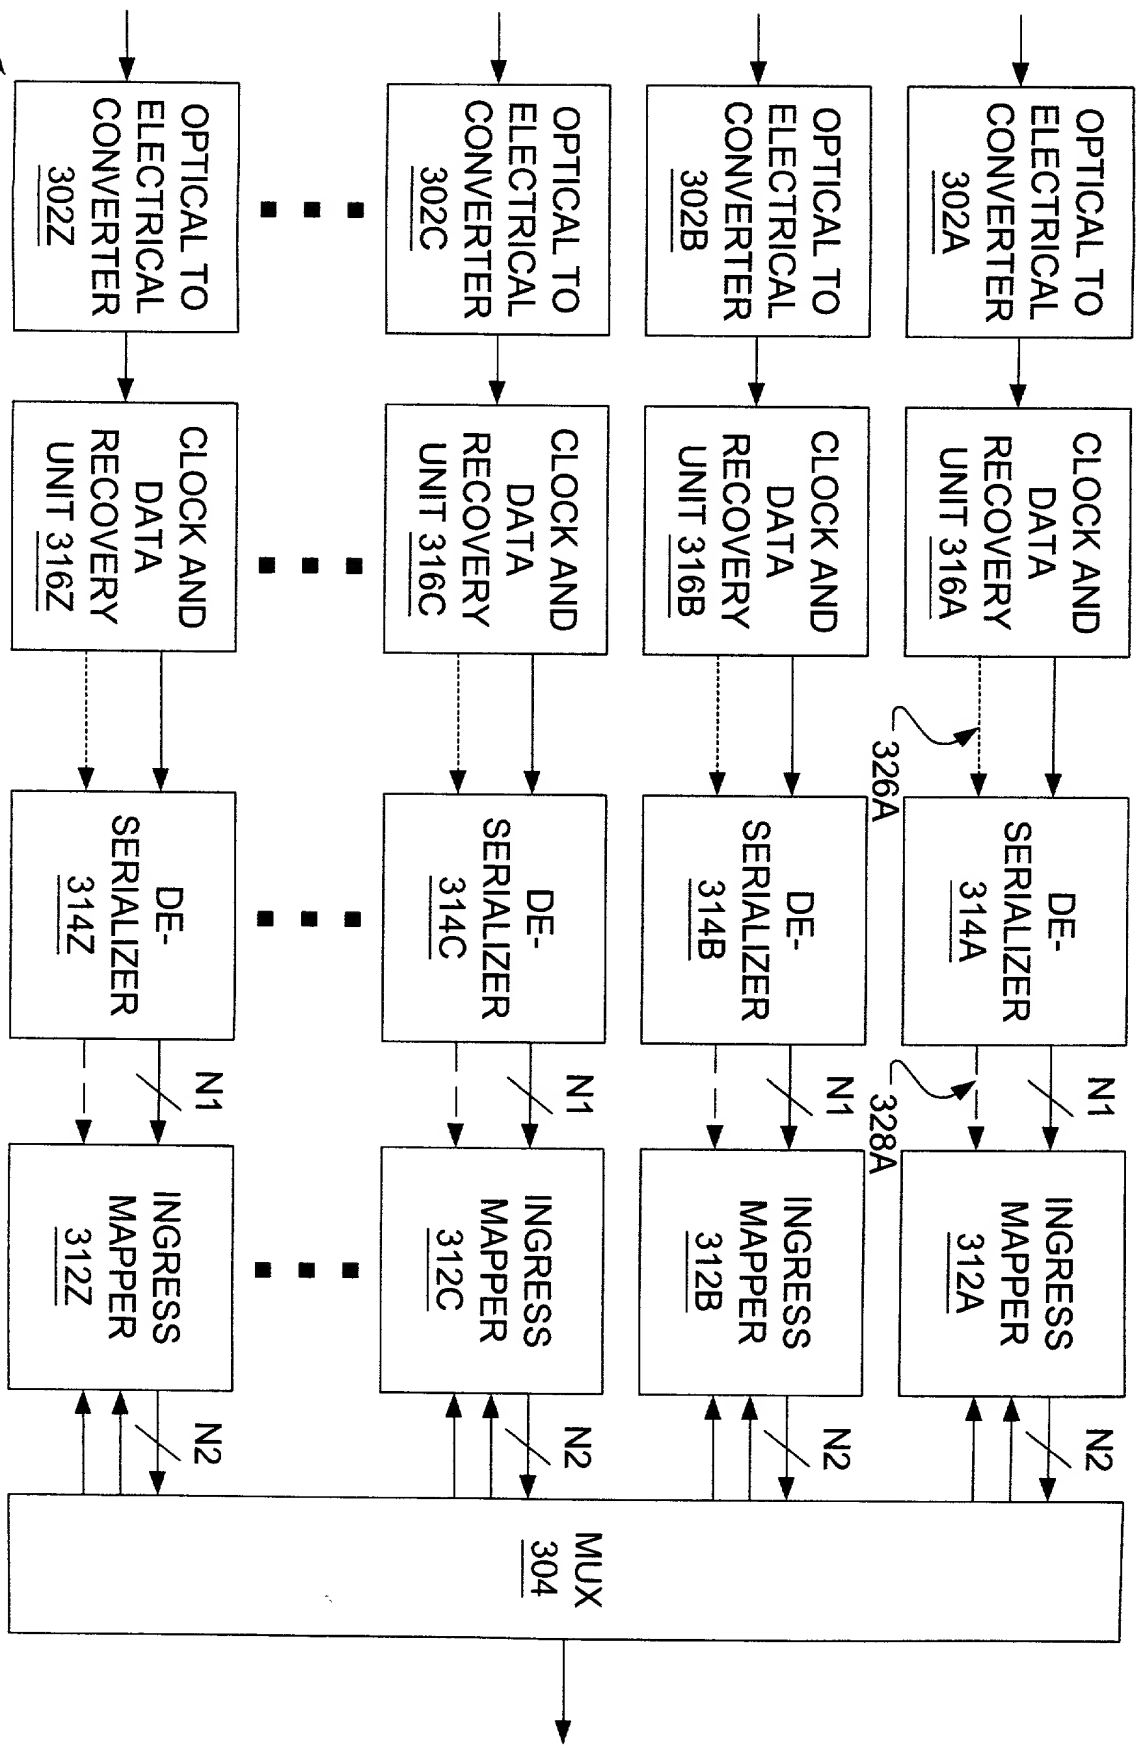


FIG. 3

112

TO NETWORK 106

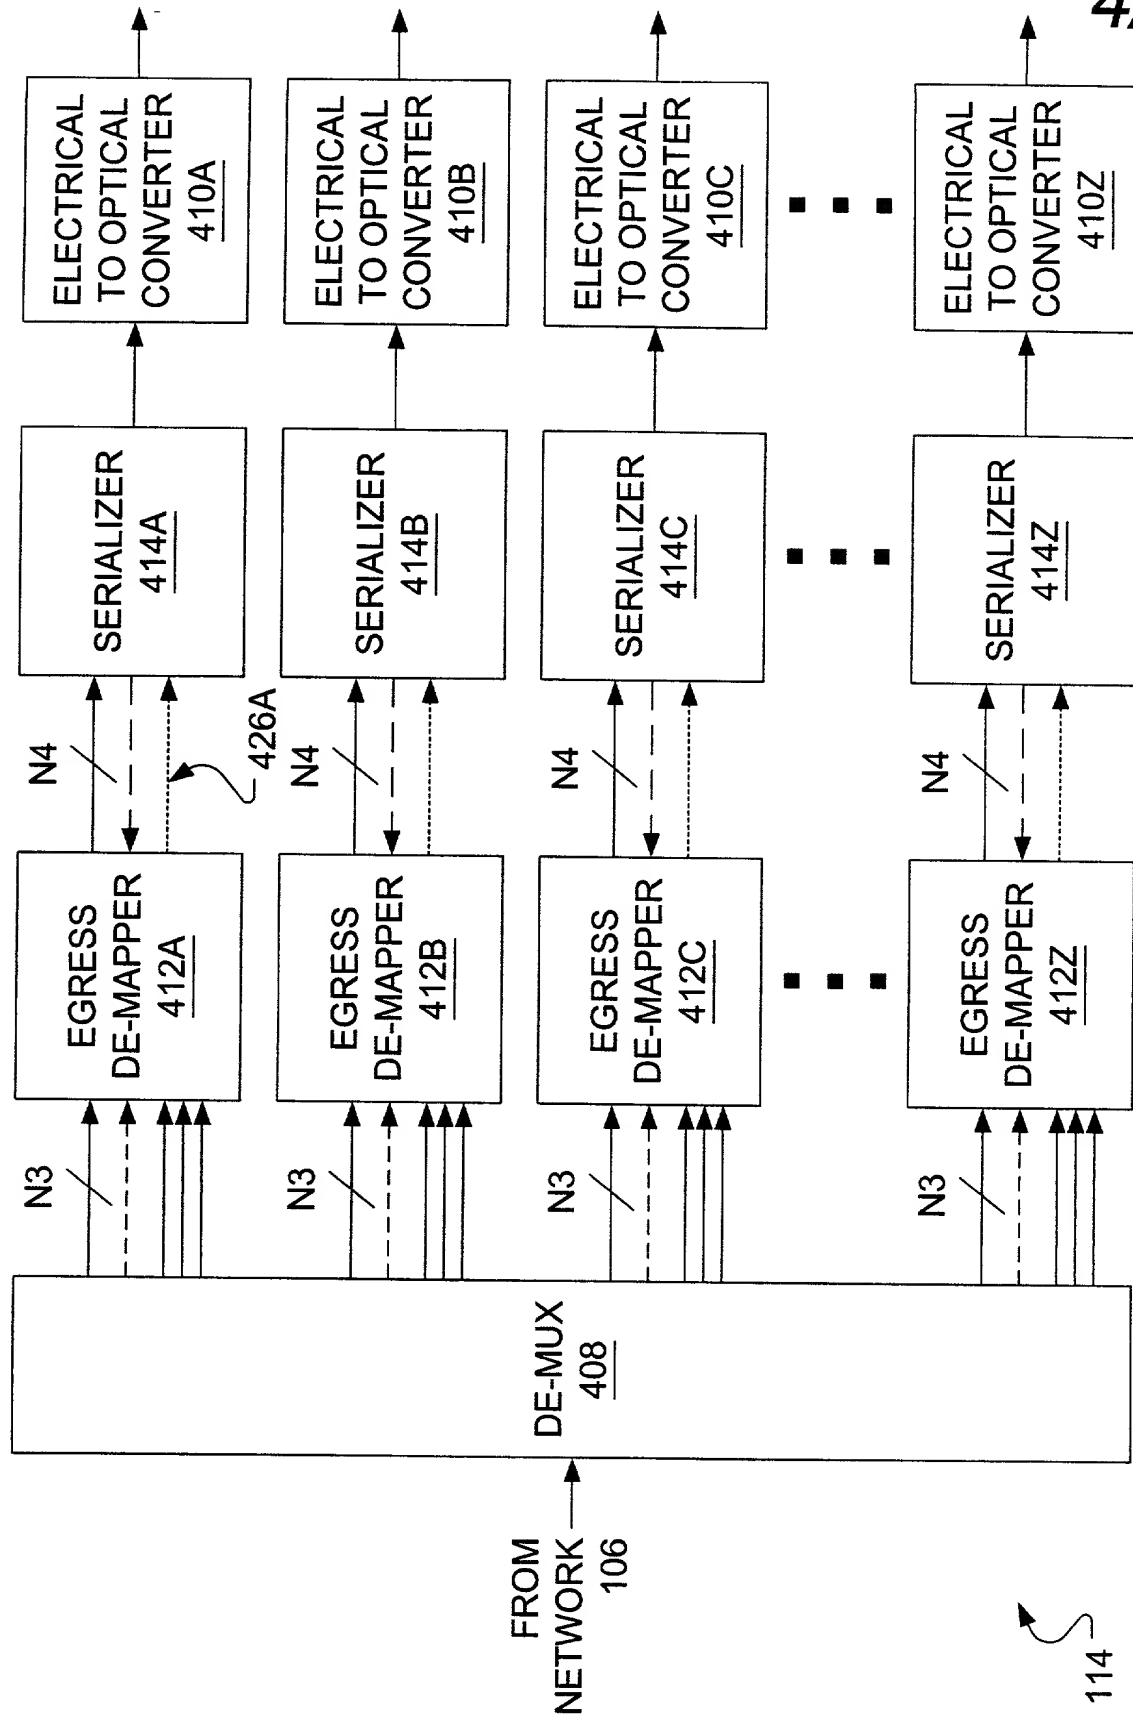


FIG. 4

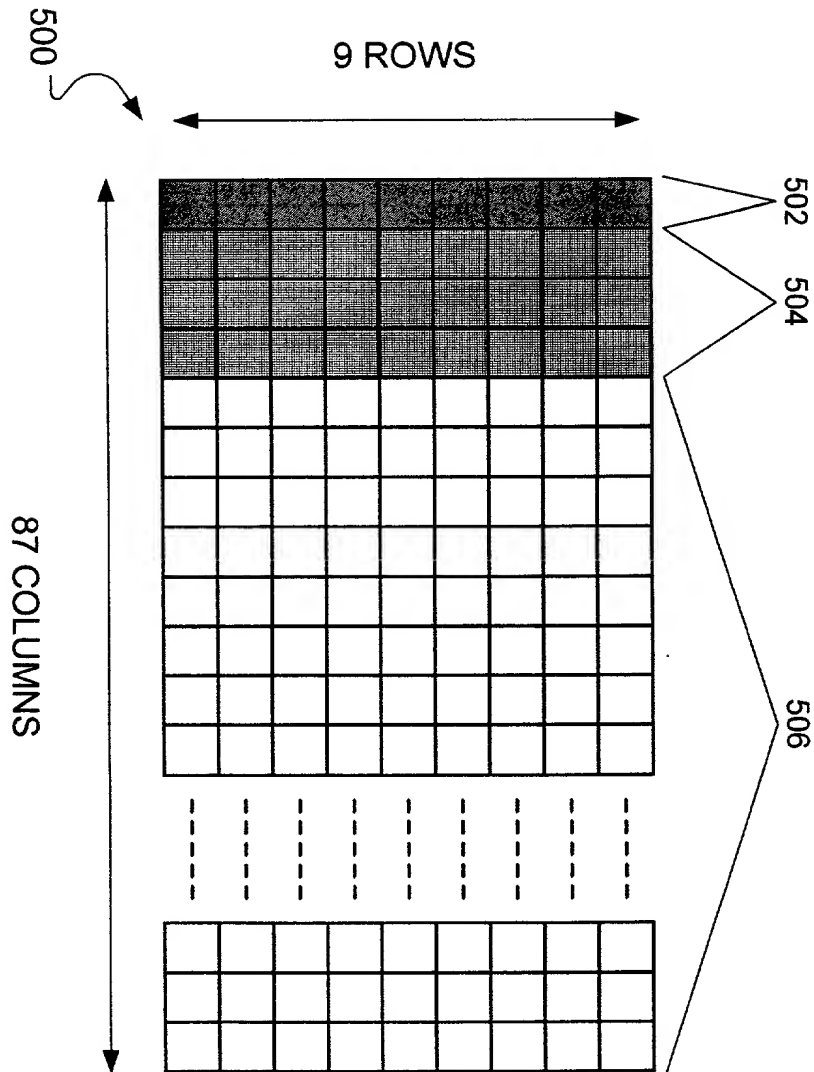


FIG. 5



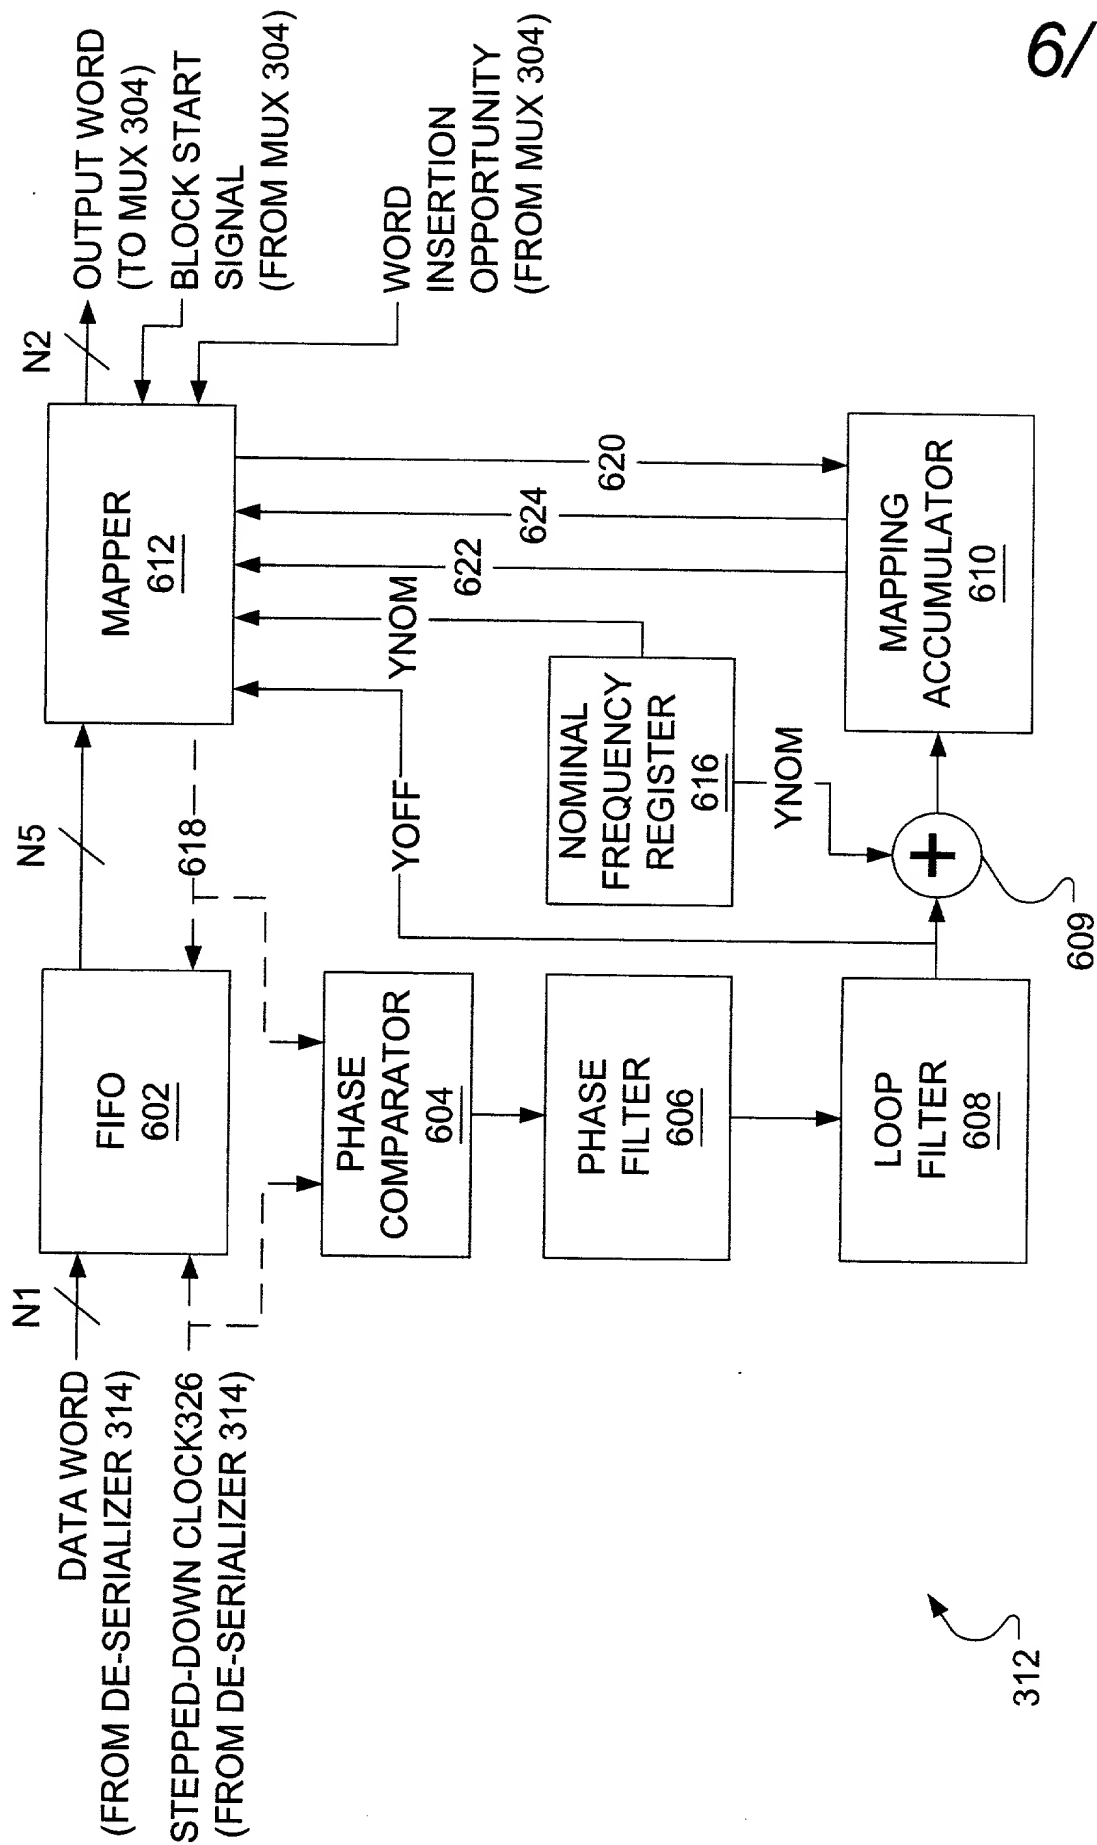



FIG. 6

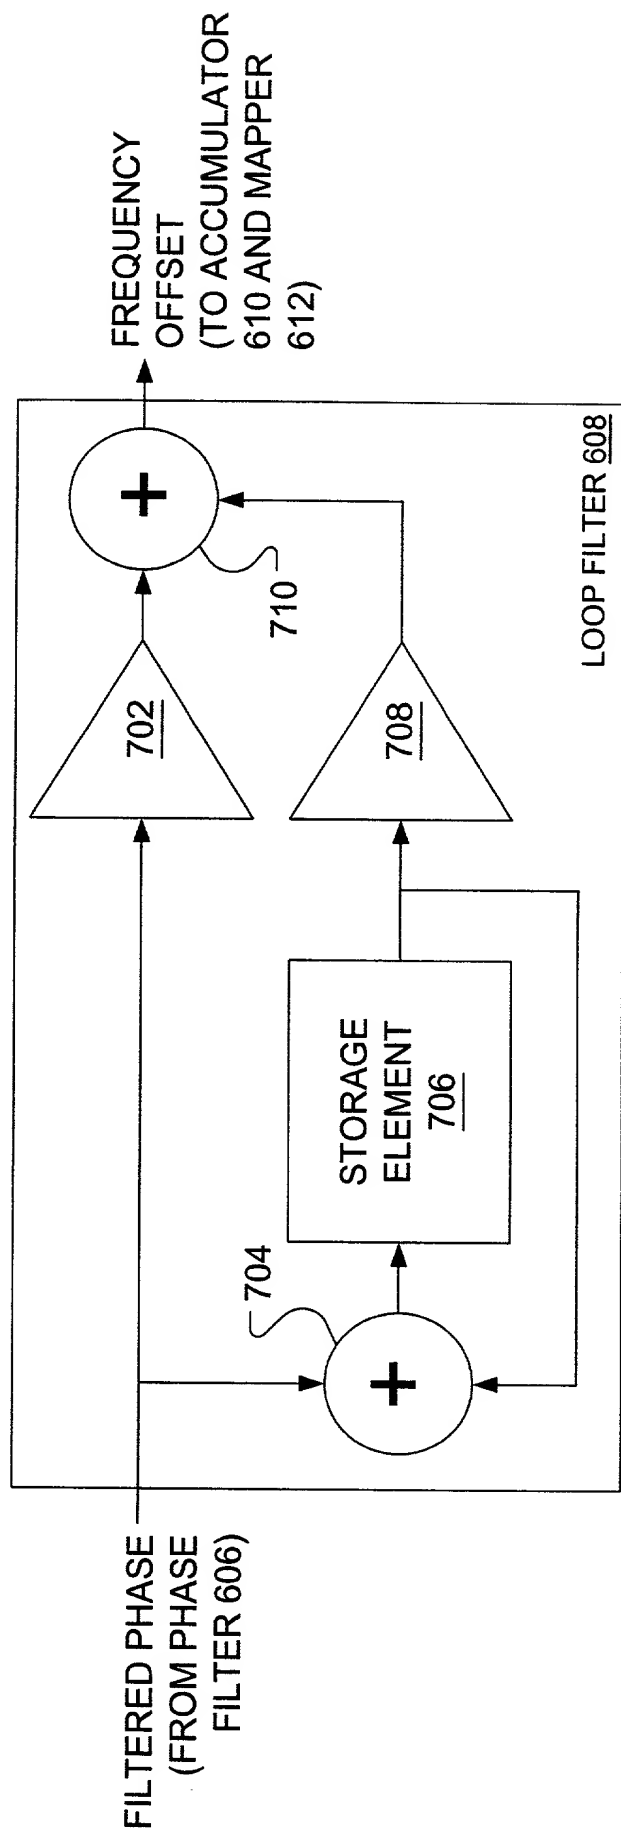

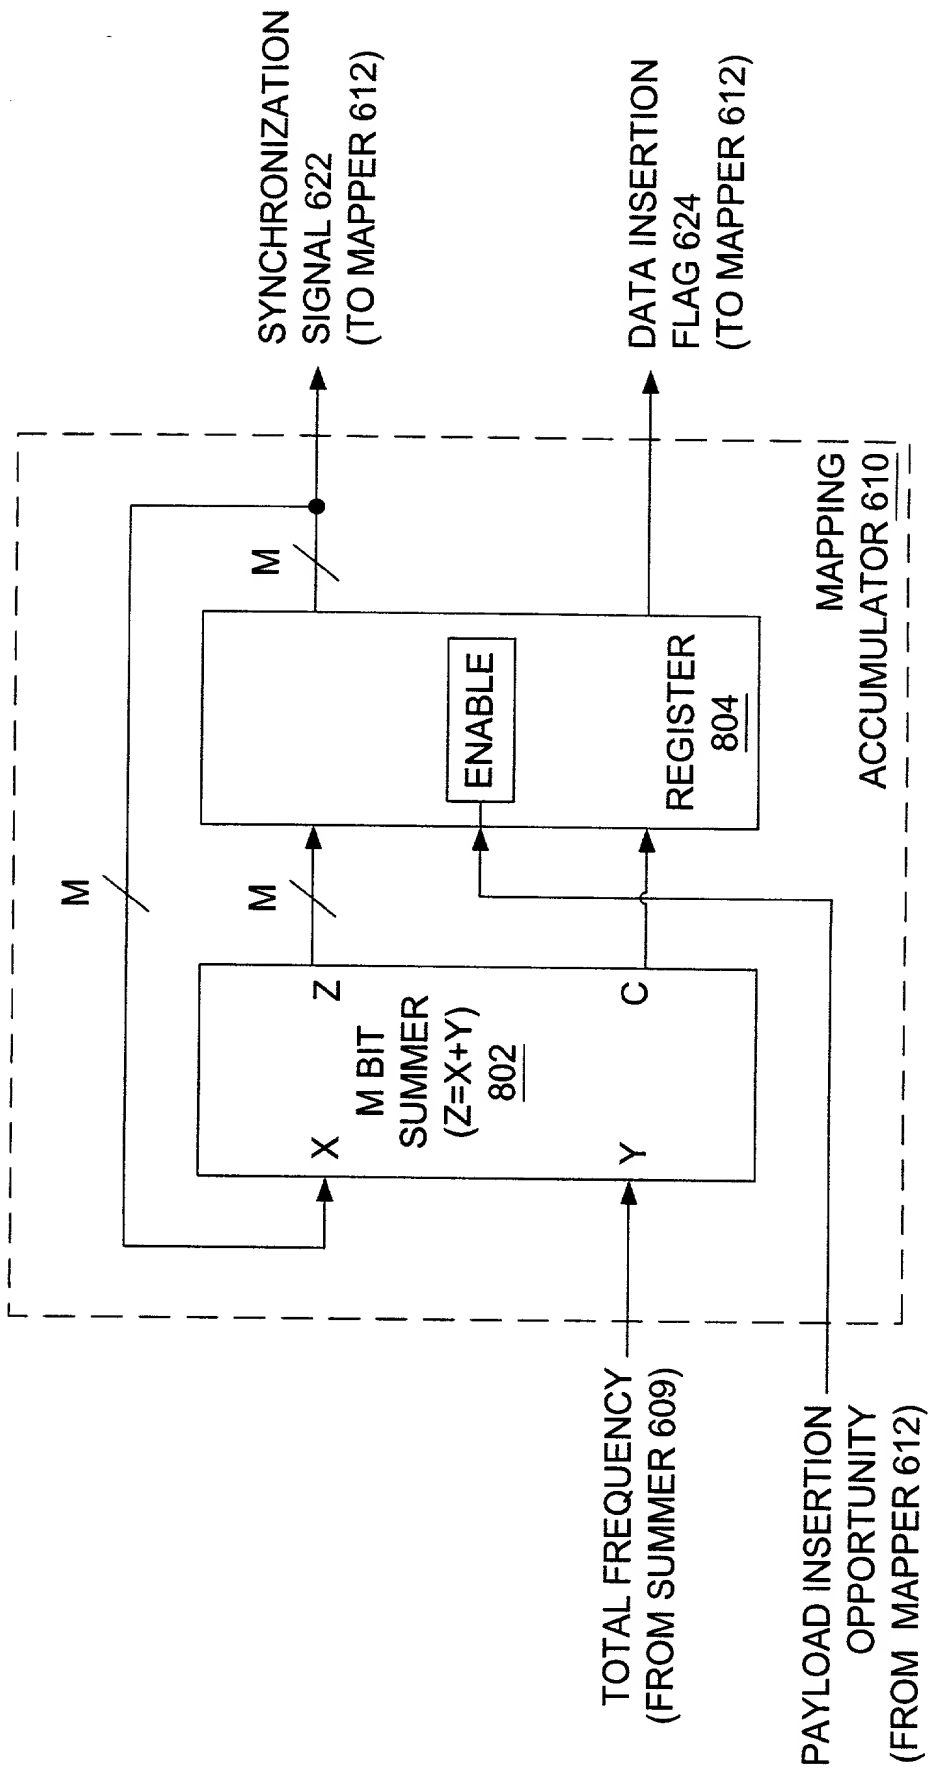

8/15

FIG. 8

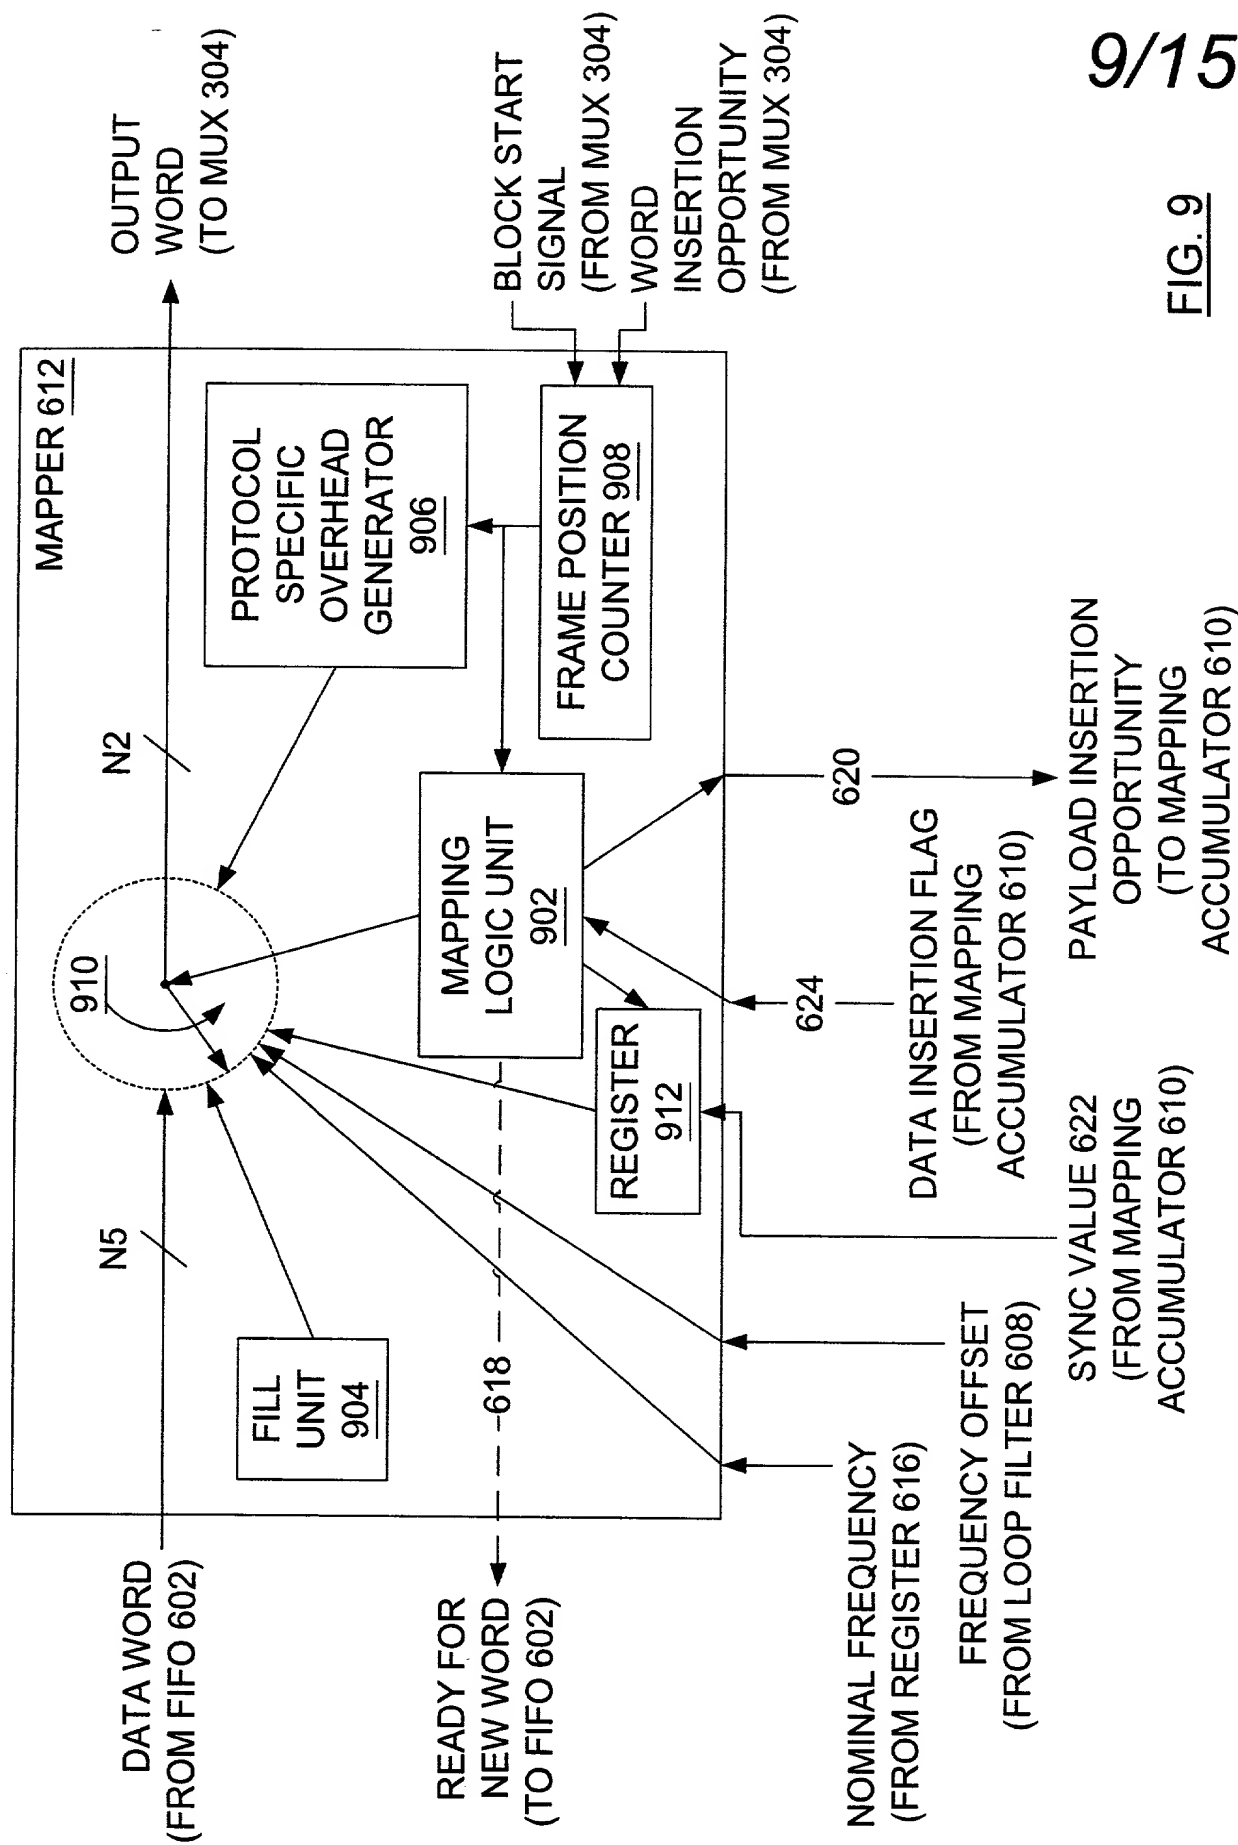

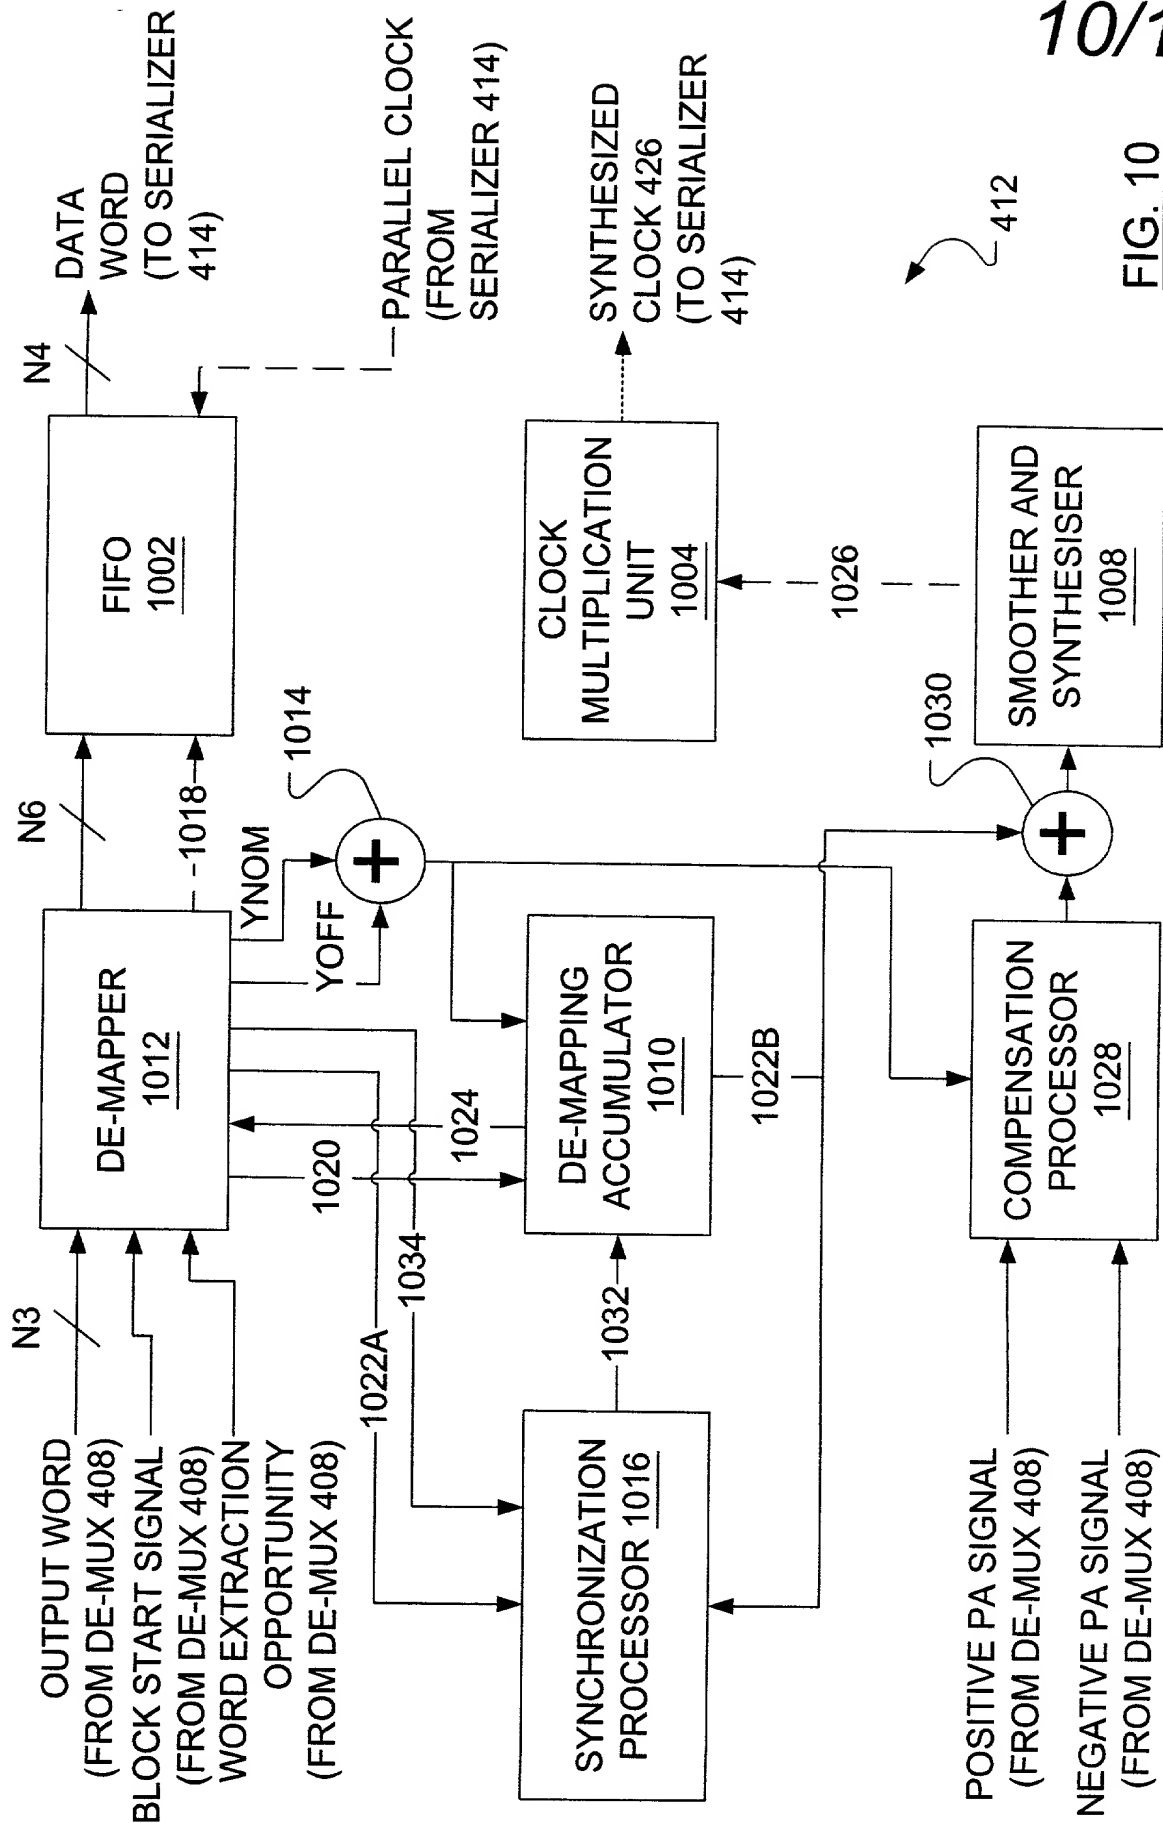


FIG. 10


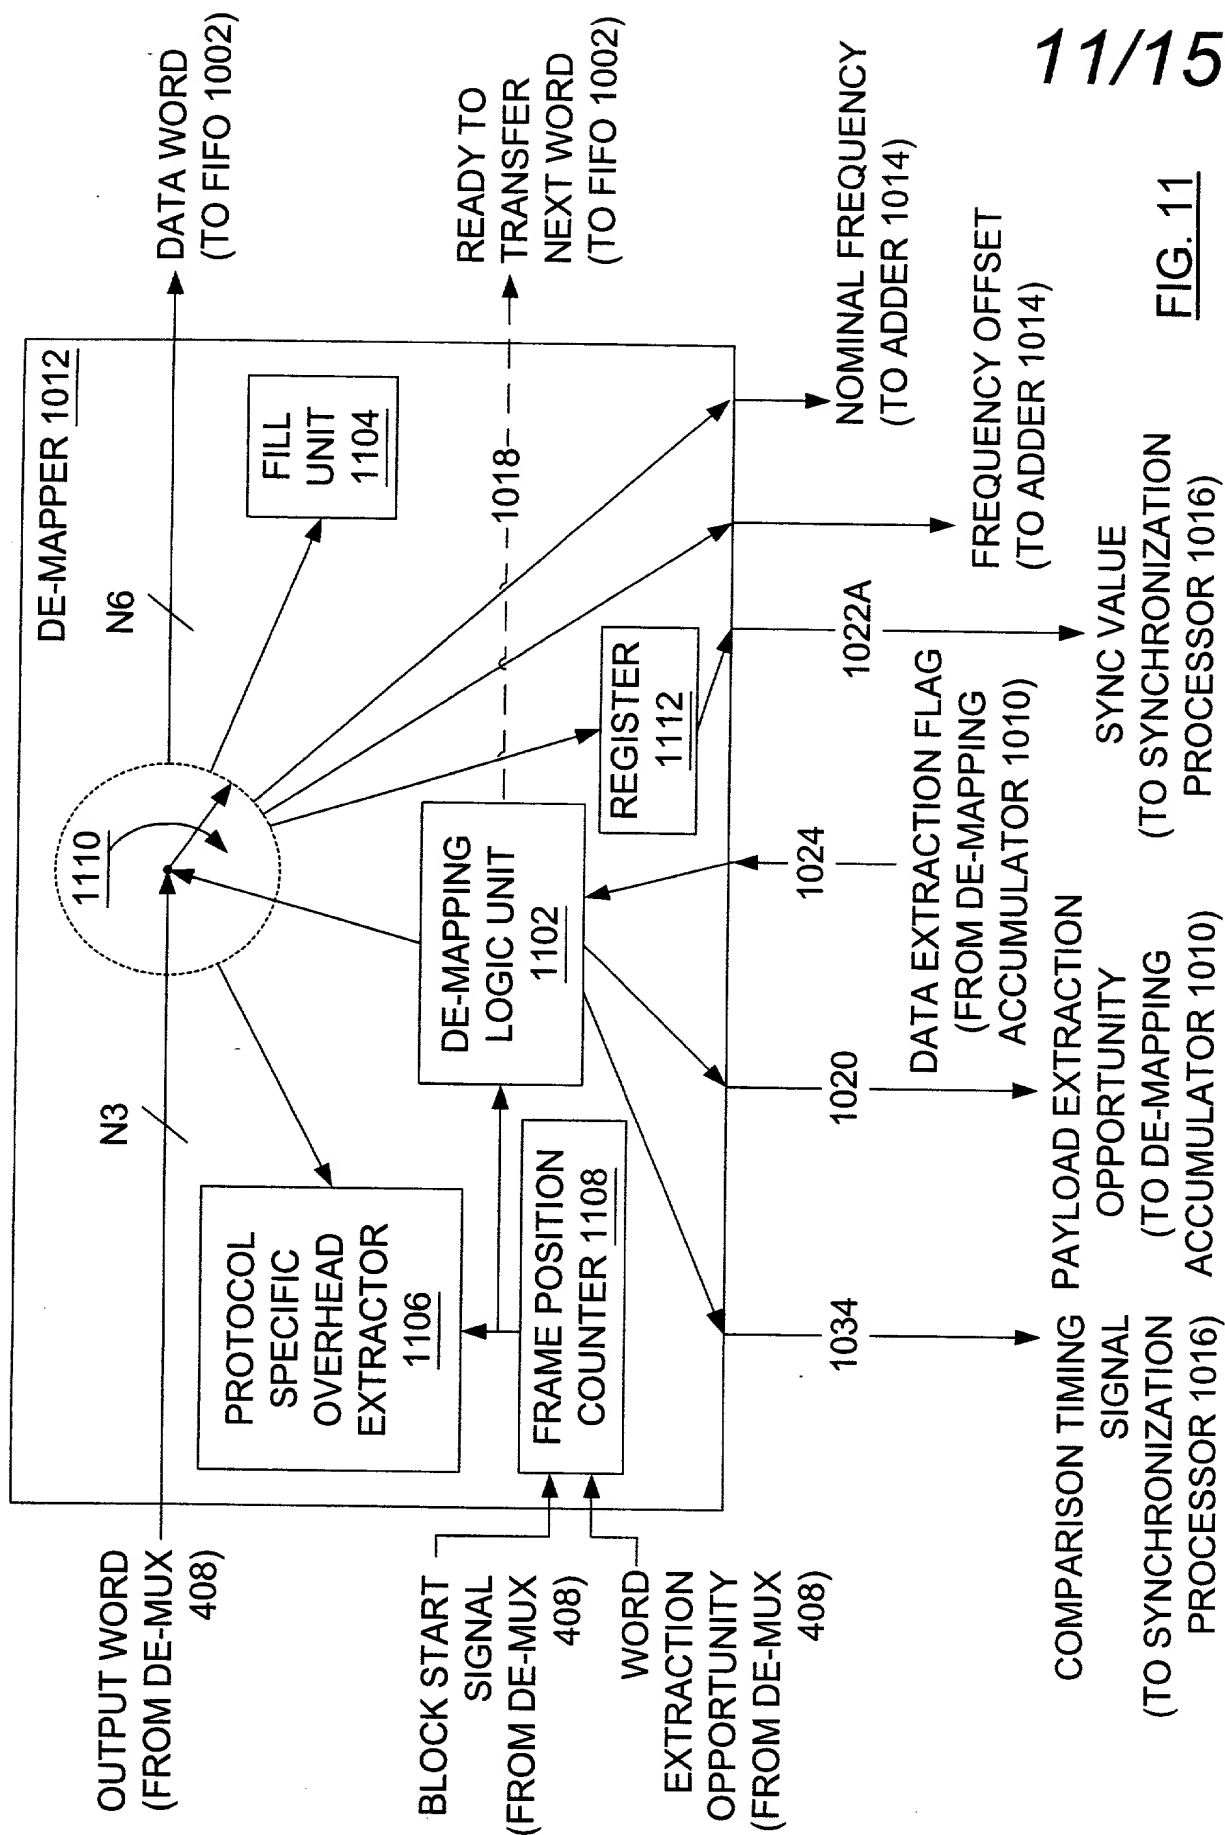


FIG. 11

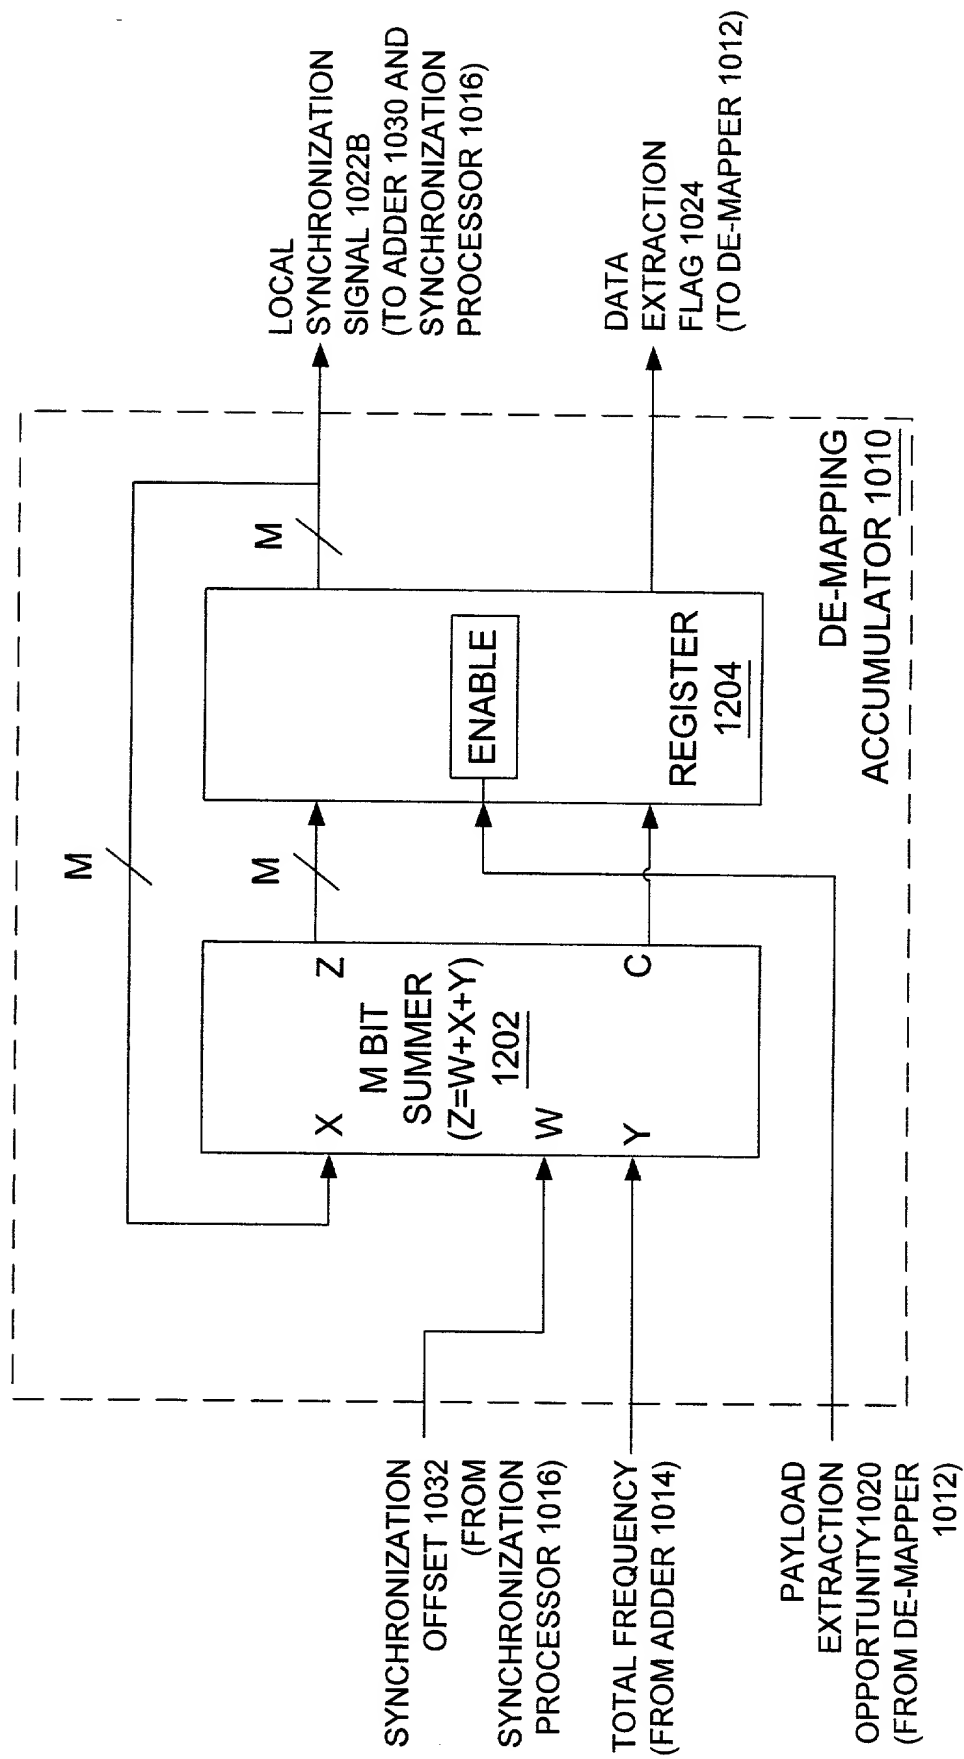

TOTAL SYNCH
(FROM ADDER 1030)

1008


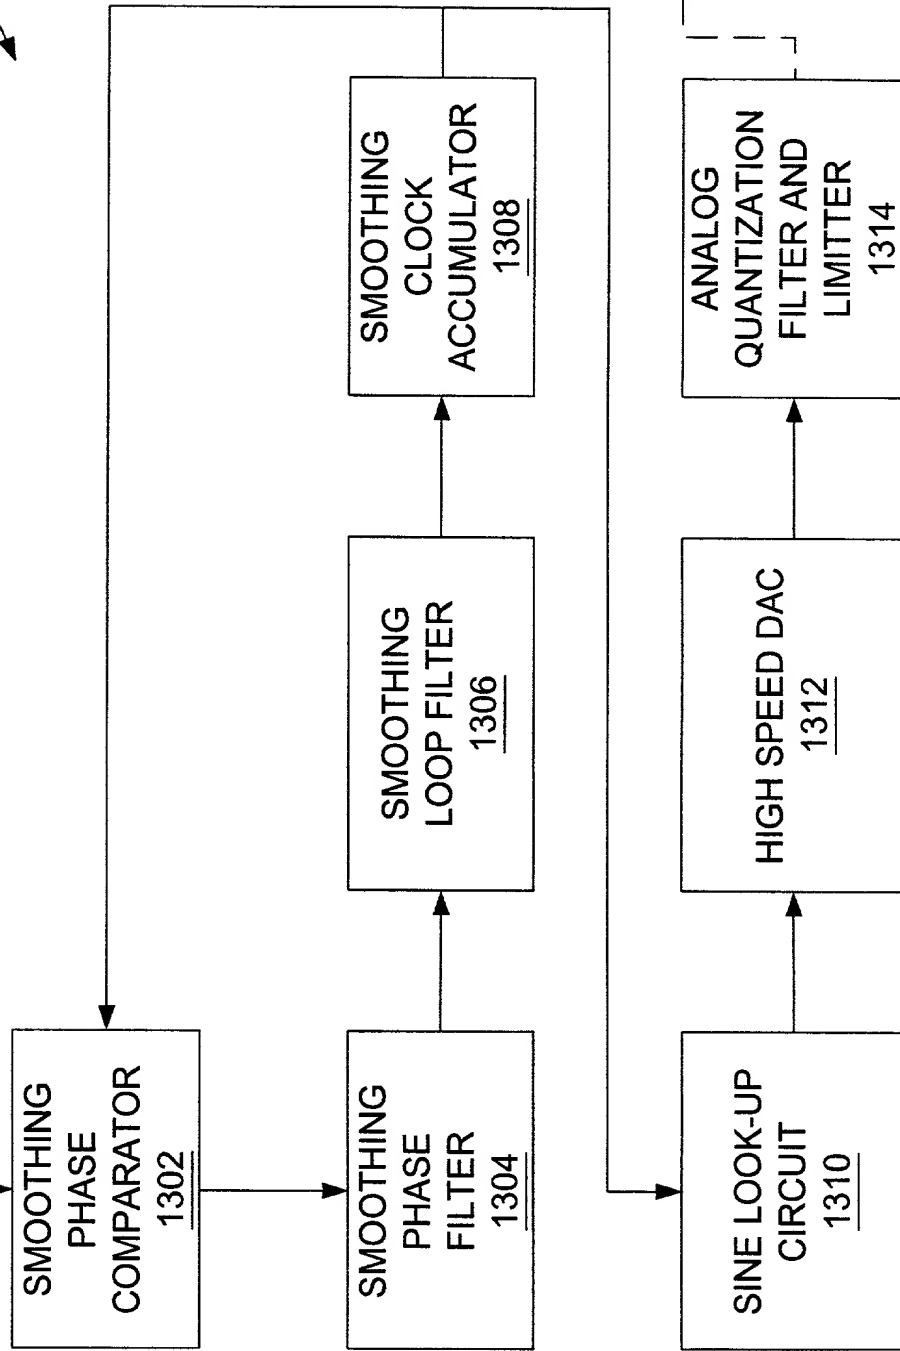


FIG. 13

502

ROW #	COLUMN 2	COLUMN 3	COLUMN 4
1	ACCYOFFH	ACCYOFFL	ACCYNOMH
2	ACCYOFFH	ACCYOFFL	ACCYNOML
3	ACCYOFFH	ACCYOFFL	ACCXH
4	ACCYOFFH	ACCYOFFL	ACCXL
5	ACCYOFFH	ACCYOFFL	ACCXCARRY
6	ACCYOFFH	ACCYOFFL	
7	ACCYOFFH	ACCYOFFL	
8	ACCYOFFH	ACCYOFFL	
9	ACCYOFFH	ACCYOFFL	

FIG. 14

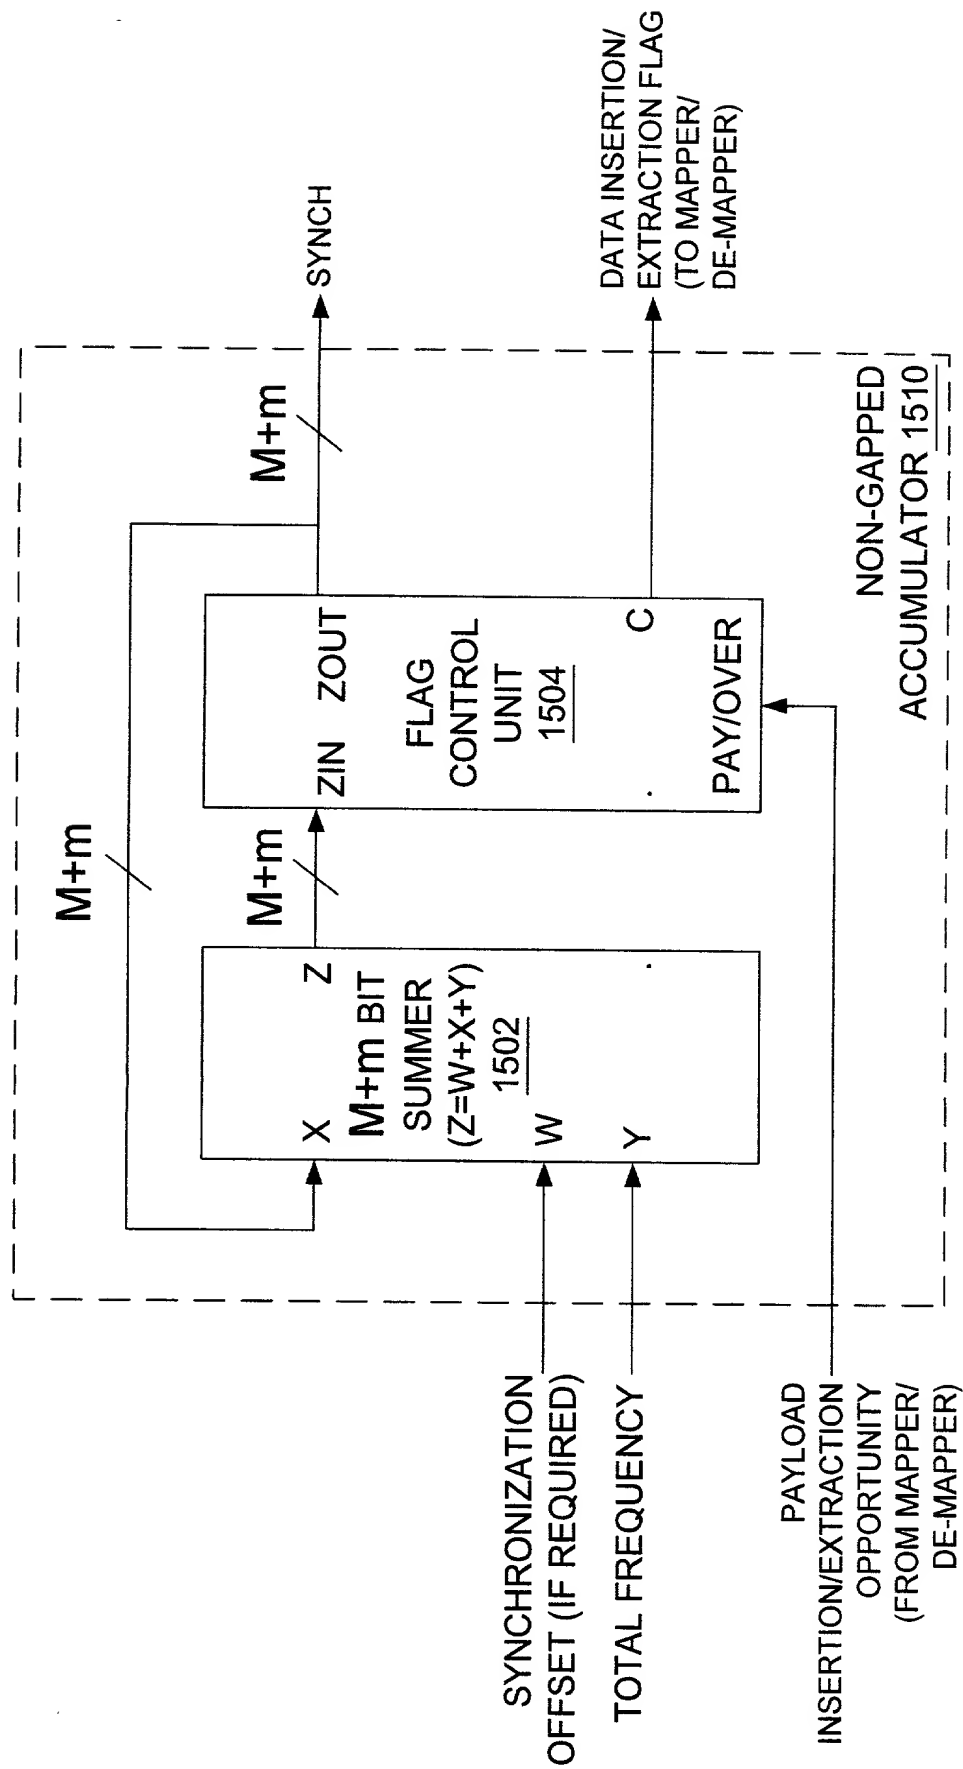

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

the specification of which

X is attached hereto.

as U.S. Application Serial No. _____.

as PCT International Application No. PCT / _____.

and (if applicable) was amended on _____.

I acknowledge the duty to disclose information known to me which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §§ 1.56(a) and (b), which state:

"(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practised or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

- (1) prior art cited in search reports of a foreign patent office in a counterpart application,
- (2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to

information already of record or being made of record in the application, and

- (1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) It refutes, or is inconsistent with, a position the applicant takes in:
 - (I) Opposing an argument of unpatentability relied on by the Office, or
 - (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability."

I hereby claim foreign priority benefits under 35 United States Code, § 119 and/or § 365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which priority is claimed, or (2) if no priority claimed, before the filing of this application:

PRIOR FOREIGN APPLICATION(S)

<u>Number</u>	<u>Country</u>	<u>Filing Date</u> <i>(Day/Month/Year)</i>	<u>Date First</u> <u>Laid-open or</u> <u>Published</u>	<u>Date</u> <u>Patented</u> <u>or Granted</u>	<u>Priority</u> <u>Claimed?</u>
---------------	----------------	---	--	---	------------------------------------

none

I hereby claim the benefit under 35 United States Code, § 119(e) of any United States provisional application(s) listed below:

<u>Application Number</u>	<u>Filing Date</u>
---------------------------	--------------------

none

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

PRIOR U.S. OR PCT APPLICATION(S)

<u>Application No.</u>	<u>Filing Date</u> <i>(day/month/year)</i>	<u>Status</u> <i>(pending, abandoned, granted)</i>
------------------------	---	---

none

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

- 3 -

I hereby appoint the following patent agents with full power of substitution, association and revocation to prosecute this application and/or international application and to transact all business in the Patent and Trademark Office connected therewith:

JOHN R. MORRISSEY (Reg. No. 28585)
KELTIE R. SIM (Reg. No. 34535)
ALISTAIR G. SIMPSON (Reg. No. 37040)
MATTHEW ZISCHKA (Reg. No. 41575)

GUNARS GAIKIS (Reg. No. 32811)
RONALD D. FAGGETTER (Reg. No. 33345)
YOON KANG (Reg. No. 40386)
YWE LOOPER (Reg. No. 43758)

PLEASE SEND CORRESPONDENCE TO:

SMART & BIGGAR
438 University Avenue
Suite 1500, Box 111
Toronto, Ontario
M5G 2K8 CANADA

Attention: Ronald D. Faggetter

Telephone: (416) 593-5514
Facsimile: (416) 591-1600

1) INVENTOR'S SIGNATURE:

[Signature]

Date:

July 7, 2000

Inventor's Name:

Matthew
(First)

D.
(Middle Initial)

Brown
(Family Name)

Country of Citizenship:

Canada

Residence:

Kinburn

Kanata, Ontario, Canada
(City, Province, Country)

Post Office Address:


23 Fernbrook Place, Kanata, Ontario K2M 2L8, Canada

124 Terraview Drive, RR2, Kinburn, Ontario

[Signature]

K0A 2H0 Canada

000720 9267960 09612976 071000

2) INVENTOR'S SIGNATURE:  Date: June 30 '00

Inventor's Name: Colin G. Kelly
(First) (Middle Initial) (Family Name)

Country of Citizenship: Canada

Residence: Ottawa, Ontario, Canada
(City, Province, Country)

Post Office Address: ^{ck}456 Briarwood Avenue, Ottawa, Ontario K2A 2H3, Canada


3) INVENTOR'S SIGNATURE:  Date: 28/6/00

Inventor's Name: Phil Campbell
(First) (Middle Initial) (Family Name)

Country of Citizenship: Canada

Residence: Woodlawn, Ontario, Canada
(City, Province, Country)

Post Office Address: 439 Allbirtch Road, RR #1, Woodlawn, Ontario K0A 3M0, Canada

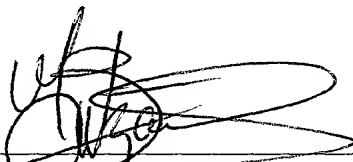4) INVENTOR'S SIGNATURE:  Date: June 29, 2000

Inventor's Name: Tony Bitzanis
(First) (Middle Initial) (Family Name)

Country of Citizenship: Canada

Residence: Ottawa, Ontario, Canada
(City, Province, Country)

Post Office Address: 85 Lees Avenue, Ottawa, Ontario K1S 0B8, Canada

000120-92627960